

Elektron Əmtəə-Nəqliyyat Qaiməsi

Şirkətlərin daxili sistemləri üçün integrasiya dokumentasiyası

Versiya: 2.0

Tarix. 07 Sentyabr 2024

Qısa məlumat


Şirkətlərin Elektron Əmtəə-Nəqliyyat Qaimələrini sürətli bir şəkildə yarada bilmələri üçün servislər və servislərdən istifadə qaydasını əks etdirən dokumentasiya sənədi hazırlanmışdır.

Necə istifadə etməli

İlk öncə rəhbər şəxs sistemə daxil olmalı, profil bölməsinə keçid etməli və servislərin istifadə edilə bilməsi üçün token əldə etməlidir.



Şəkil 1. E-xidmet.ayna.gov.az portalından digital login vasitəsi ilə daxil olma

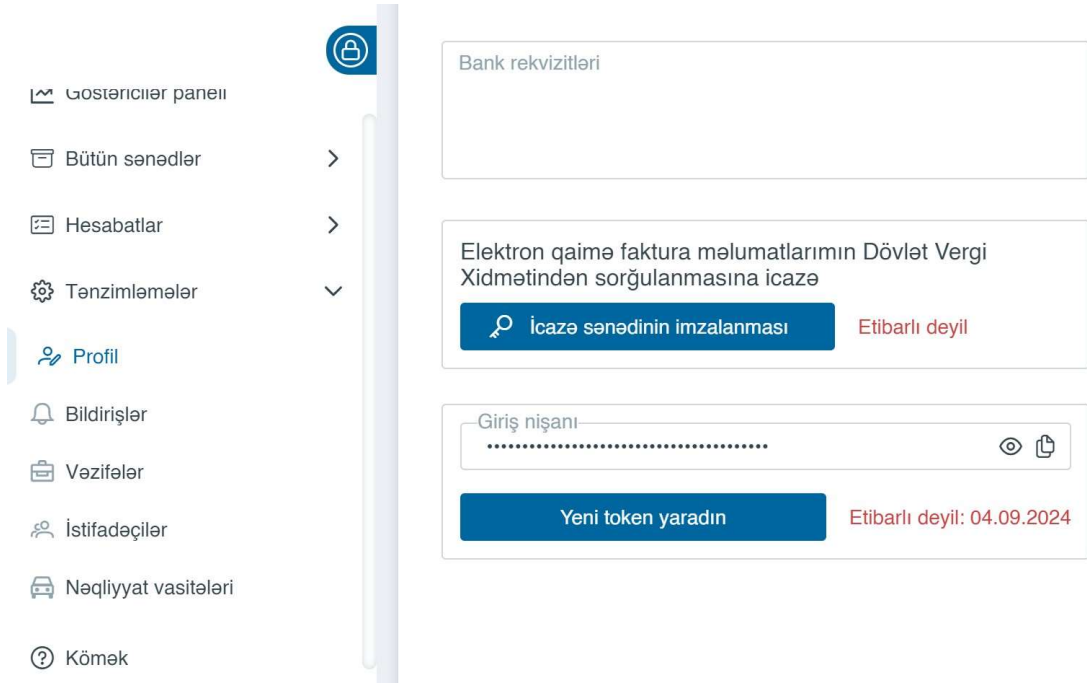

Şəkil 2. Tənzimləmələr bölməsindən profil səhifəsinə keçid və tokenin yaradılması

Qeyd: Servislərdən istifadə qaydası və onlar haqqında daha ətraflı məlumat dokumentasiya sənədində qeyd edilmişdir. Dokumentasiyanın hazırlanması zamanı ortaq dil olaraq ingilis dili qəbul edilmiş və həmin dildə hazırlanmışdır.

*ELEKTRON
ƏMTƏƏ-
NƏQLİYYAT
QAİMƏSİ
SİSTEMİ*

API sənədləşməsi

Mündəricat

<u>Giriş</u>	7
<u>API Son Nöqtələrinə Giriş</u>	7
<u>Mühitlər</u>	7
<u>Şirkətləri əldə et</u>	8
REQUEST PARAMETERS	8
RESPONSE	8
EXAMPLE REQUEST	8
EXAMPLE RESPONSE #1	9
<u>Qaimə növlərini əldə et</u>	10
REQUEST PARAMETERS	10
RESPONSE	10
EXAMPLE REQUEST	10
EXAMPLE RESPONSE	10
<u>İşçiləri əldə et</u>	12
REQUEST PARAMETERS (OPTIONAL):.....	12
RESPONSE	12
EXAMPLE REQUEST	12
EXAMPLE RESPONSE	13
<u>Nəqliyyat vasitələrini əldə et</u>	14
REQUEST PARAMETERS (OPTIONAL):.....	14
RESPONSE	14
EXAMPLE REQUEST	14
EXAMPLE RESPONSE	14
<u>Nəqliyyat vasitəsi əlavə et və ya yenilə</u>	16
REQUEST PARAMETERS	16
RESPONSE	16
EXAMPLE REQUEST	16
EXAMPLE RESPONSE	17
<u>Qaimələrin siyahısını əldə et</u>	18
REQUEST PARAMETERS	18

RESPONSE	19
EXAMPLE REQUEST	21
EXAMPLE RESPONSE	21
<u>Qaimə təfərrüatlarını əldə et</u>	<u>23</u>
REQUEST PARAMETERS (REQUIRED):	23
RESPONSE	23
EXAMPLE REQUEST	27
EXAMPLE RESPONSE	27
<u>Qaimə yarat və ya yenilə</u>	<u>32</u>
REQUEST PARAMETERS	32
RESPONSE	33
EXAMPLE REQUEST	34
EXAMPLE RESPONSE	34
<u>Qaiməni sil</u>	<u>38</u>
REQUEST PARAMETERS	38
RESPONSE	38
EXAMPLE REQUEST	38
EXAMPLE RESPONSE	38
<u>Ölçü vahidlərini əldə et</u>	<u>39</u>
REQUEST PARAMETERS (OPTIONAL):.....	39
RESPONSE	39
EXAMPLE REQUEST	39
EXAMPLE RESPONSE	39
<u>HS kodlarını əldə et</u>	<u>40</u>
REQUEST PARAMETERS	40
RESPONSE	40
EXAMPLE REQUEST	40
EXAMPLE RESPONSE	40
<u>Qaimə qeydləri əlavə et və ya yenilə</u>	<u>41</u>
REQUEST PARAMETERS	41
RESPONSE	41
EXAMPLE REQUEST	42
EXAMPLE RESPONSE	42
<u>Qaimə qeydini sil</u>	<u>43</u>
REQUEST PARAMETERS	43

RESPONSE	43
EXAMPLE REQUEST	43
EXAMPLE RESPONSE	43
<u>Qaimə üçün imzalama sorğusu göndər</u>	<u>44</u>
REQUEST PARAMETERS	44
RESPONSE	44
EXAMPLE REQUEST	44
EXAMPLE RESPONSE	44
<u>Qaimənin imzalanma prosesinin vəziyyətini yoxla</u>	<u>46</u>
REQUEST PARAMETERS	46
RESPONSE	46
EXAMPLE REQUEST	46
EXAMPLE RESPONSE	46
<u>Qaimənin imzasını rədd et.....</u>	<u>47</u>
REQUEST PARAMETERS	47
RESPONSE	47
EXAMPLE REQUEST	47
EXAMPLE RESPONSE	47
<u>İmzalanmış qaimə üçün ləğv sorğusu göndər.....</u>	<u>48</u>
REQUEST PARAMETERS	48
RESPONSE	48
EXAMPLE REQUEST	48
EXAMPLE RESPONSE	48
<u>Qaimənin ləğv imzalanma prosesinin vəziyyətini yoxla</u>	<u>50</u>
REQUEST PARAMETERS	50
RESPONSE	50
EXAMPLE REQUEST	50
EXAMPLE RESPONSE	50
<u>Qaimə üçün qəbul/rədd imzalama sorğusu göndər</u>	<u>51</u>
REQUEST PARAMETERS	51
RESPONSE	51
EXAMPLE REQUEST	51
EXAMPLE RESPONSE	51
<u>Qəbul/rədd imzalanma prosesinin vəziyyətini yoxla</u>	<u>52</u>

REQUEST PARAMETERS	53
RESPONSE	53
EXAMPLE REQUEST	53
EXAMPLE RESPONSE	53
<u>Qaimə üçün qismən göndəriş.....</u>	<u>54</u>
REQUEST PARAMETERS	54
RESPONSE	54
EXAMPLE REQUEST	54
EXAMPLE RESPONSE	54
<u>Qaimənin PDF surətini əldə et.....</u>	<u>55</u>
REQUEST PARAMETERS (REQUIRED):	55
REQUEST PARAMETERS (OPTIONAL):.....	55
RESPONSE	55
EXAMPLE REQUEST	55
EXAMPLE RESPONSE	56
<u>Marşrut siyahılarını əldə edin.....</u>	<u>57</u>
REQUEST PARAMETERS (OPTIONAL):.....	57
RESPONSE	57
EXAMPLE REQUEST	59
EXAMPLE RESPONSE	59
<u>Marşrut siyahısı növlərini əldə edin.....</u>	<u>62</u>
REQUEST PARAMETERS	62
RESPONSE	62
EXAMPLE REQUEST	62
EXAMPLE RESPONSE	62
<u>Marşrut siyahısı əlavə edin və ya yeniləyin.....</u>	<u>63</u>
REQUEST PARAMETERS	63
RESPONSE	63
EXAMPLE REQUEST	66
EXAMPLE RESPONSE	66
<u>Marşrut siyahısında qaimələri yeniləyin.....</u>	<u>67</u>
REQUEST PARAMETERS	67
RESPONSE	67
EXAMPLE REQUEST	67
EXAMPLE RESPONSE	67

<u>Marşrut siyahısı üçün imzalama və ya ləğv sorğusu göndər</u>	68
REQUEST PARAMETERS	68
RESPONSE	68
EXAMPLE REQUEST	68
EXAMPLE RESPONSE	68
 <u>Marşrut siyahısının imzalanma prosesinin vəziyyətini yoxlayın</u>	 70
REQUEST PARAMETERS	70
RESPONSE	70
EXAMPLE REQUEST	70
EXAMPLE RESPONSE	70
 <u>Marşrut siyahısını sil</u>	 71
REQUEST PARAMETERS	71
RESPONSE	71
EXAMPLE REQUEST	71
EXAMPLE RESPONSE	71
 <u>Marşrut siyahısının boş mövqələrinin siyahısını əldə et</u>	 72
REQUEST PARAMETERS (OPTIONAL):.....	72
RESPONSE	72
EXAMPLE REQUEST	72
EXAMPLE RESPONSE	72
 <u>Marşrut siyahısına boş mövqələr əlavə et və ya yenilə</u>	 73
REQUEST PARAMETERS	73
RESPONSE	73
EXAMPLE REQUEST	73
EXAMPLE RESPONSE	73
 <u>Marşrut siyahısından boş mövqeni sil</u>	 74
REQUEST PARAMETERS	74
RESPONSE	74
EXAMPLE REQUEST	74
EXAMPLE RESPONSE	74
 <u>Marşrut siyahısının PDF surətini əldə et</u>	 75
REQUEST PARAMETERS (REQUIRED):	75
REQUEST PARAMETERS (OPTIONAL):.....	75
RESPONSE	75

EXAMPLE REQUEST	75
EXAMPLE RESPONSE	76

Qaimələr üçün toplu imzalama sorğusu göndər **77**

REQUEST PARAMETERS	77
RESPONSE.....	77
EXAMPLE REQUEST	77
EXAMPLE RESPONSE	78

Qaimələrin toplu imzalanma prosesinin vəziyyətini yoxla..... **79**

REQUEST PARAMETERS	79
RESPONSE.....	79
EXAMPLE REQUEST	79
EXAMPLE RESPONSE	79

Giriş

Elektron Əmtəə-Nəqliyyat Qaiməsi üçün API sənədlərinə xoş gəlmisiniz. API, Elektron Əmtəə-Nəqliyyat Qaimələri və Yol vərəqələrinin siyahılarını əldə etmək, yenilərini yaratmaq, mövcud olanları yeniləmək və onların vəziyyətini yoxlamaq üçün son nöqtələr təqdim edir.

Bütün sorğular başlıqda X-Requested-With parametrini tələb edir.

API Son Nöqtələrinə Giriş

Son nöqtələrə giriş əldə etmək üçün əsas istifadəçi hesabının profil səhifəsində giriş nişanı yaratmalısınız. Bu giriş nişanı sorğu başlıqlarında icazə verici nişan kimi daxil edilməlidir.

Mühitlər

Production Mühiti

Production mühiti üçün aşağıdakı əsas URL-dən istifadə edin:

Əsas URL: <https://e-enq.ayna.gov.az/api/>

Şirkətləri əldə edin

Metod sistemdə qeydiyyatdan keçmiş şirkətlərin və fiziki şəxslərin siyahısını qaytarır.

Endpoint: */partner_list*

HTTP Method: POST

Authorization: Bearer <token>

Request parameters:

Parameter	Type	Description
name	<i>varchar(250)</i>	Name of the company, searching by include
email	<i>varchar(250)</i>	Email of company
fiscal_id	<i>varchar(50)</i>	TIN of company
partner_type	<i>integer</i>	Company type: 0 - all, 1 - legal entity, 2 - individual

Notes: for the endpoint it's required to use one of the filter parameters, i.e. name, email, fiscal_id or id_card.

Response:

The response returns array of companies or individuals registered in the system , filtered by parameter values

Parameter	Type	Description
id	<i>integer</i>	Unique identifier of the company
name	<i>varchar(250)</i>	Name of company
chief_id	<i>integer</i>	Unique identifier of main company employee
address	<i>varchar(1024)</i>	Address of company
email	<i>varchar(250)</i>	Email of company
fiscal_id	<i>varchar(50)</i>	TIN of company
id_card	<i>varchar(50)</i>	ID card of owner of company
partner_type	<i>integer</i>	Company type: 1 - legal entity 2 - individual
status	<i>varchar(50)</i>	Parameter is returning only in case of error
message	<i>varchar(1024)</i>	In case of status error, detailed information about cause of the error

Example request:

```
POST /partner_list
Content-Type: application/json
```

```
{  
  "fiscal_id": "1234567890"  
}
```

Example response #1:

```
HTTP/1.1 200 OK  
Content-Type: application/json  
[  
  {  
    "id": 953,  
    "name": "John Smith INC",  
    "chief_id": 28,  
    "address": "Baku plaza",  
    "email": "john.smith@doe.com",  
    "fiscal_id": "1234567890",  
    "partner_type": 1  
  }  
]
```

Qaimə növlərini əldə et

Metod Elektron Əmtəə-Nəqliyyat Qaiməsinin qaimə növlərinin siyahısını qaytarır.

Endpoint: */doc_types*

HTTP Method: POST

Authorization: Bearer <token>

Request parameters:

Method does not use Request parameters

Response:

The response returns a list of waybill types

Parameter	Type	Description
id	<i>integer</i>	Unique identifier of the waybill type
name	<i>varchar(250)</i>	Name of waybill type
attr	<i>integer</i>	Waybill type attribute: 0 - default 1 - consignee omitted
series	<i>varchar(10)</i>	Default waybill series

Example request:

```
POST /doc_types
Content-Type: application/json
```

Example response:

```
HTTP/1.1 200 OK
Content-Type: application/json
[
  {
    "id": 1,
    "name": "Malların bir vergi ödəyicisindən digər vergi ödəyicisinə təqdim edilməsi ilə bağlı daşınması",
    "attr": 0,
    "series": "NQMT"
  },
  {
    "id": 2,
    "name": "Malların bir vergi ödəyicisindən digər vergi ödəyicisinə qaytarılması ilə bağlı daşınması",
    "attr": 0,
    "series": "NQMQ"
  },
  {
    "id": 3,
```

```

    "name": "Əvvəlcədən sifariş edilməyən, satışa çıxarılan malların daşınması",
    "attr": 1,
    "series": "NQSE"
  },
  {
    "id": 4,
    "name": "Pərakəndə qaydada son istehlakçıya təqdim edilmiş malların daşınması",
    "attr": 0,
    "series": "NQPT"
  },
  {
    "id": 5,
    "name": "Pərakəndə qaydada təqdim edilmiş son istehlakçıdan qaytarılan malların daşınması",
    "attr": 0,
    "series": "NQPQ"
  },
  {
    "id": 6,
    "name": "Ümumi istifadədə olan avtomobil yollarına çıxmaqla malların təsərrüfatdaxili daşınması",
    "attr": 0,
    "series": "NQTD"
  },
  {
    "id": 7,
    "name": "Emala veriləcək malların daşınması",
    "attr": 0,
    "series": "NQEV"
  },
  {
    "id": 8,
    "name": "Emal prosesi keçmiş qaytarılan malların daşınması",
    "attr": 0,
    "series": "NQEQ"
  },
  {
    "id": 9,
    "name": "İdخال edilmiş və ya ixrac olunan malların ölkədaxili daşınması",
    "attr": 0,
    "series": "NQDX"
  },
  {
    "id": 10,
    "name": "Alış aktı (elektron alış aktı) əsasında əldə edilmiş malların daşınması",
    "attr": 0,
    "series": "NQAA"
  }
]

```

İşçiləri əldə et

Metod işçilərin siyahısını qaytarır.

Endpoint: */employees*

HTTP Method: POST

Authorization: Bearer <token>

Request parameters (optional):

Parameter	Type	Description
id	<i>integer</i>	Unique identifier of employee
name	<i>varchar(250)</i>	Name of employee
id_card	<i>varchar(50)</i>	ID card of employee

Response:

The response returns a list of employees

Parameter	Type	Description
id	<i>integer</i>	Unique identifier of employee
first_name	<i>varchar(100)</i>	First name of employee
last_name	<i>varchar(100)</i>	Last name of employee
post_id	<i>integer</i>	Employee's position identifier
id_card	<i>varchar(50)</i>	ID card of employee
passport	<i>varchar(50)</i>	Passport number
phone	<i>varchar(50)</i>	Phone number
email	<i>varchar(250)</i>	Email
birthday	<i>varchar(10)</i>	Birthday , format YYYY-MM-DD
id_user	<i>varchar(10)</i>	User ID , uses as code for Asan signature
date_in	<i>varchar(10)</i>	Date of hire , format YYYY-MM-DD
date_out	<i>varchar(10)</i>	Date of release, format YYYY-MM-DD
email_confirmed	<i>boolean</i>	Email confirmation attribute
phone_confirmed	<i>boolean</i>	Phone confirmation attribute
name	<i>varchar(250)</i>	Name of employee (concatenation of first_name and last name)
post_name	<i>varchar(100)</i>	Employee's position name

Example request:

```
POST /employees/  
Content-Type: application/json
```

Example response:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "total": 2,
  "items": [
    {
      "id": 303,
      "first_name": "1TESTTTTT",
      "last_name": "2323",
      "post_id": 518,
      "id_card": "44",
      "passport": "42",
      "phone": "+232323232111",
      "email": "edward@gmail.com",
      "birthday": null,
      "id_user": "dddsdsdsds",
      "date_in": null,
      "date_out": null,
      "email_confirmed": false,
      "phone_confirmed": false,
      "name": "1TESTTTTT 2323",
      "post_name": "driver of truck"
    },
    {
      "id": 293,
      "first_name": "NK2",
      "last_name": "BO2",
      "post_id": 94,
      "id_card": "1251241",
      "passport": "1234251",
      "phone": "+994121313412",
      "email": "3211@gmail.com",
      "birthday": "2023-01-03",
      "id_user": "030123",
      "date_in": null,
      "date_out": null,
      "email_confirmed": false,
      "phone_confirmed": false,
      "name": "NK2 BO2",
      "post_name": "Test 1"
    }
  ]
}
```

Nəqliyyat vasitələrini əldə et

Metod nəqliyyat vasitələrinin siyahısını qaytarır.

Endpoint: /cars/

HTTP Method: POST

Authorization: Bearer <token>

Request parameters (optional):

Parameter	Type	Description
car_num	<i>varchar(50)</i>	State number of vehicle
is_trailer	<i>boolean</i>	Vehicle trailer attribute, possible values false – is not a trailer true – is a trailer

Response:

The response returns a list of vehicles

Parameter	Type	Description
id	<i>integer</i>	Unique identifier of vehicle
car_num	<i>varchar(50)</i>	State number of vehicle
carrying	<i>float</i>	Maximum permitted weight
trailer	<i>integer</i>	Vehicle type , possible values: 1 – truck 2 – trailer 3 – semitrailer 4 – tractor
car_model_id	<i>integer</i>	Unique identifier of vehicle model
maker	<i>varchar(250)</i>	Maker name
model	<i>varchar(250)</i>	Model name

Example request:

```
POST /cars/  
Content-Type: application/json
```

Example response:

```
HTTP/1.1 200 OK  
Content-Type: application/json  
{  
  "total": 3,  
  "items": [  
    {
```

```
    "id": 175,  
    "car_num": "00UA0123",  
    "carrying": 27.0,  
    "trailer": 3,  
    "car_model_id": 747,  
    "maker": "Datsun",  
    "model": "Sunny"  
  },  
  {  
    "id": 163,  
    "car_num": "01CH401",  
    "carrying": 6.4,  
    "trailer": 1,  
    "car_model_id": 1,  
    "maker": "AC",  
    "model": "378 GT Zagato"  
  },  
  {  
    "id": 311,  
    "car_num": "02H3C4RQ",  
    "carrying": 29.0,  
    "trailer": 1,  
    "car_model_id": 293,  
    "maker": "Brabus",  
    "model": "ML 63 Biturbo"  
  }  
]  
}
```

Nəqliyyat vasitəsi əlavə et və ya yenilə

Metod yeni nəqliyyat vasitəsi əlavə etməyə və ya mövcud olanı yeniləməyə imkan verir.

Endpoint: `/save_car/`

HTTP Method: POST

Authorization: Bearer <token>

Request parameters:

Parameter	Type	Description
id	<i>integer</i>	Unique identifier of vehicle, 0 – creating a new >0 – updating existing
car_num	<i>varchar(50)</i>	State number of vehicle
carrying	<i>float</i>	Maximum permitted weight
trailer	<i>integer</i>	Vehicle type, possible values: 1 – truck 2 – trailer 3 – semitrailer 4 – tractor
car_model_id	<i>integer</i>	Unique identifier of vehicle model

Response :

Parameter	Type	Description
status	<i>varchar(50)</i>	Status of request, possible values error – in case of error
message	<i>varchar(1024)</i>	Detailed information about result
id	<i>integer</i>	Unique identifier of vehicle
car_num	<i>varchar(50)</i>	State number of vehicle
carrying	<i>float</i>	Maximum permitted weight
trailer	<i>integer</i>	Vehicle type, possible values: 1 – truck 2 – trailer 3 – semitrailer 4 – tractor
car_model_id	<i>integer</i>	Unique identifier of vehicle model

Example request:

```
POST /save_car/
Content-Type: application/json
{
  "car_num": "BH4444AC",
  "carrying": 35
}
```

Example response:

```
HTTP/1.1 200 OK  
Content-Type: application/json
```

```
{  
  "id": 319,  
  "car_num": "BH4444AC",  
  "car_model_id": null,  
  "carrying": 35,  
  "trailer": 0  
}
```

Qaimələrin siyahısını əldə et

Bu metod qaimələrin siyahısını əldə etməyə imkan verir.

Endpoint: `/doc_list/`

HTTP Method: POST

Authorization: Bearer <token>

Request parameters:

Parameter	Type	Description
type_doc	integer	Waybill document type, possible values: 1 - at work, 2 - draft, 3 - deleted, 4 - canceled, 5 - rejected, 6 - completed
date_from	varchar(50)	Starting date, format "yyyy-mm-ddThh:mm:ss.sss"
date_for	varchar(50)	Ending date, format "yyyy-mm-ddThh:mm:ss.sss"
num	varchar(50)	Document number, searching by entry
route_list_num	varchar(50)	Number of route list document, searching by entry
route_list_id	integer	Route list identifier
type_partner	integer	Counterparty type, possible values: 1 - shipper, 2 - carrier, 3 - consignee
name	varchar(250)	Name or TIN of counterparty type, parameter requires set value of type_partner, searching by entry
email	varchar(250)	Email of counterparty type, requires set of value for type_partner parameter
status	integer	Document status, possible values: 1 - not signed 2 - waiting for own signature 3 - waiting for counterparties signature 4 - signed by all 5 - signature rejected 6 - on the way 7 - delivered 8 - refused to accept 9 - accepted by driver 10 - delivered, not confirmed

page_index	<i>integer</i>	Page number
page_size	<i>integer</i>	Quantity of documents per page
sort_field	<i>varchar(50)</i>	Name of field for sorting
sort_direction	<i>varchar(5)</i>	Sorting direction, possible values: asc – ascending desc – descending

Response:

The response returns total count of the waybill documents with details about each one

Parameter	Type	Description
status	<i>varchar(50)</i>	Parameter is returning only in case of error
message	<i>varchar(1024)</i>	In case of status error, detailed information about cause of the error
total	<i>integer</i>	Quantity of the documents
items	<i>array of objects</i>	In case of total > 0 array will contain the information about documents
Document object parameters description		
id	<i>integer</i>	Unique identifier of the document
num	<i>varchar(50)</i>	Waybill document number
dat	<i>varchar(50)</i>	Date of the document, format "yyyy-mm-ddThh:mm:ss.sss"
upd_time	<i>varchar(50)</i>	Last modification date, format "yyyy-mm-ddThh:mm:ss.sss"
notes	<i>varchar(250)</i>	Notes
arrival_not_confirmed	<i>varchar(50)</i>	Date and time of not confirmed arrival, format "yyyy-mm-ddThh:mm:ss.sss"
arrival	<i>varchar(50)</i>	Date and time of arrival confirmation, format "yyyy-mm-ddThh:mm:ss.sss"
departure	<i>varchar(50)</i>	Date and time of departure, format "yyyy-mm-ddThh:mm:ss.sss"
delivery_duration	<i>float</i>	Delivery duration calculated by navigation system, in minutes
distance	<i>float</i>	Distance between map points in meters
route_list_id	<i>integer</i>	Identifier of route list
route_list_num	<i>varchar(50)</i>	Number of route list
src_address	<i>varchar(1024)</i>	Source address
dst_address	<i>varchar(1024)</i>	Destination address
estimated_delivery_duration	<i>float</i>	Estimated delivery duration in minutes
shipper_id	<i>integer</i>	Identifier of shipper
consignee_id	<i>integer</i>	Identifier of consignee
carrier_id	<i>integer</i>	Identifier of carrier
is_del	<i>integer</i>	Document deletion attribute, possible values: 0 - Normal, 1 - Deleted

reject		<i>integer</i>	Document signature rejected attribute, possible values: 0 - Normal, 1 - Rejected
draft		<i>integer</i>	Document draft state attribute, possible values: 0 - Normal, 1 - Draft
is_dangerous		<i>boolean</i>	Document attribute which determines that cargo is dangerous, possible values: false - Normal, true - Cargo is dangerous
is_heavyweight		<i>boolean</i>	Document attribute which determines that cargo is overweighted, possible values: false - Normal, true - Cargo is overweighted
is_oversized		<i>boolean</i>	Document attribute which determines that cargo is oversized, possible values: false - Normal, true - Cargo is oversized
is_reloading_prohibited		<i>boolean</i>	Document attribute which determines that cargo can be reloaded to another vehicle, possible values: false - Can be reloaded, true - Reloading is prohibited
weight		<i>float</i>	Weight of cargo
dst_latitude,		<i>float</i>	Latitude of destination address
dst_longitude		<i>float</i>	Longitude of destination address
src_latitude		<i>float</i>	Latitude of source address
src_longitude		<i>float</i>	Longitude of source address
shipper		<i>object</i>	Shipper information
Shipper object parameters	id	<i>integer</i>	Identifier
	name	<i>varchar(250)</i>	Name
	email	<i>varchar(250)</i>	Email
	tin	<i>varchar(250)</i>	Tax identification number
carrier		<i>object</i>	Carrier information
Carrier object parameters	id	<i>integer</i>	Identifier
	name	<i>varchar(250)</i>	Name
	email	<i>varchar(250)</i>	Email
	tin	<i>varchar(250)</i>	Tax identification number
consignee		<i>object</i>	Consignee information
Consignee object parameters	id	<i>integer</i>	Identifier
	name	<i>varchar(250)</i>	Name
	email	<i>varchar(250)</i>	Email
	tin	<i>varchar(250)</i>	Tax identification number
status		<i>integer</i>	Document status, possible values: 1 - not signed 2 - waiting for own signature 3 - waiting for counterparties signature 4 - signed by all 5 - signature rejected

			6 - on the way 7 - delivered 8 - refused to accept 9 - accepted by driver 10 - delivered, not confirmed
forwarder_name		<i>varchar(250)</i>	Name of forwarder
forwarder_id_card		<i>varchar(50)</i>	ID card of forwarder
route_list_position -		<i>integer</i>	Position of this document in route list
driver		<i>Object</i>	Information about the driver
Driver object parameters	id	<i>Integer</i>	Identifier of driver
	id_card	<i>varchar(50)</i>	ID card of driver
	name	<i>varchar(250)</i>	Name of driver
car_num		<i>varchar(50)</i>	Vehicle state number
trailer_num		<i>varchar(50)</i>	Trailer state number
car_id		<i>integer</i>	Vehicle identifier
trailer_id		<i>integer</i>	Trailer identifier

Example request:

```
POST /doc_list/
Content-Type: application/json
{
  "date_from": "2022-05-01T11:42:39.514",
  "date_for": "2023-05-27T11:42:39.514",
  "type_doc": 1
}
```

Example response:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "total": 1,
  "items": [
    {
      "id": 14,
      "uid": 14,
      "num": "10000000014",
      "dat": "2022-06-27T08:42:52.704",
      "upd_time": "2022-11-25T10:20:52.546",
      "arrival_not_confirmed": null,
      "arrival": null,
      "departure": null,
      "delivery_duration": 0.0,
      "notes": "",
      "shipper_id": 1,
      "consignee_id": 1,
      "carrier_id": 2,
      "estimated_delivery_duration": 0.0,
      "distance": 0.0,
      "route_list_id": null,
    }
  ]
}
```

```

    "route_list_num": null,
    "src_address": "",
    "dst_address": "",
    "is_del": 0,
    "reject": 0,
    "draft": 0,
    "weight": 88000.0,
    "is_dangerous": false,
    "is_heavyweight": false,
    "is_oversized": false,
    "is_reloading_prohibited": false,
    "dst_latitude": -1.0,
    "dst_longitude": -1.0,
    "src_latitude": -1.0,
    "src_longitude": -1.0,
    "shipper": {
      "id": 1,
      "name": "Jhon",
      "tin": "0012345",
      "email": "me@me.com"
    },
    "carrier": {
      "id": 2,
      "name": "UNITED SUPPLY COMPANY",
      "tin": "123465789",
      "email": "irada@me.com"
    },
    "consignee": {
      "id": 1,
      "name": "JOHN",
      "tin": "0012345",
      "email": "me@me.com"
    },
    "driver_id": null,
    "driver": {
      "id": null,
      "id_card": "",
      "name": ""
    },
    "status": 3,
    "forwarder_name": null,
    "forwarder_id_card": null,
    "route_list_position": 0,
    "car_id": null,
    "car_num": null,
    "trailer_id": null,
    "trailer_num": null
  }
}
}

```

Qaimə təfərrüatlarını əldə et

Bu metod qaimələrin təfərrüatlarını əldə etməyə imkan verir.

Endpoint: `/doc_card/`

HTTP Method: POST

Authorization: Bearer <token>

Request parameters (required):

Parameter	Type	Description
id	<i>integer</i>	Document identifier

Response:

The response returns waybill details in case of document id is existing in the system

Parameter	Type	Description
status	<i>varchar(50)</i>	Parameter is returning only in case of error
message	<i>varchar(1024)</i>	In case of status error, detailed information about cause of the error
id	<i>integer</i>	Document identifier
num	<i>varchar(50)</i>	Document number
doc_type_id	<i>integer</i>	Document type identifier (see <code>doc_types</code> endpoint)
doc_type_attr	<i>integer</i>	Document type attribute, possible values: 0 – regular document 1 – document without consignee
doc_type_name	<i>varchar(250)</i>	Document type name
dat	<i>varchar(50)</i>	Date of the document, format "yyyy-mm-ddThh:mm:ss.sss",
payer	<i>integer</i>	Payer attribute, possible values: 1 - Shipper, 2 - Consignee
created_by_obj_id	<i>integer</i>	Identifier of the organisation which create the document
tax_invoice_num	<i>varchar(50)</i>	Document invoice number
upd_time	<i>varchar(50)</i>	Last modification date, format "yyyy-mm-ddThh:mm:ss.sss",
distance	<i>float</i>	Distance between map points, in kilometers
route_list_position	<i>integer</i>	Position of this document in route list
arrival	<i>varchar(50)</i>	Date and time of arrival confirmation, format "yyyy-mm-ddThh:mm:ss.sss"
departure	<i>varchar(50)</i>	Date and time of departure, format "yyyy-mm-ddThh:mm:ss.sss"

dst_latitude	<i>float</i>	Latitude of destination address
dst_longitude	<i>float</i>	Longitude of destination address
src_latitude	<i>float</i>	Latitude of source address
src_longitude	<i>float</i>	Longitude of source address
current_latitude	<i>float</i>	Current latitude value
current_longitude	<i>float</i>	Current longitude value
notes	<i>varchar(250)</i>	Document notes
shipper_id	<i>integer</i>	Identifier of shipper
consignee_id	<i>integer</i>	Identifier of consignee
carrier_id	<i>integer</i>	Identifier of carrier
ready_to_departure	<i>varchar(50)</i>	Date and time when cargo is ready to dispatch, format "yyyy-mm-ddThh:mm:ss.sss"
arrival_not_confirmed	<i>varchar(50)</i>	Date and time of cargo arrival, format "yyyy-mm-ddThh:mm:ss.sss"
insurance_notes	<i>varchar(1024)</i>	Insurance information
acceptance_notes	<i>varchar(1024)</i>	Acceptance information
dangerous_notes	<i>varchar(1024)</i>	Notes for dangerous cargo
src_address_notes	<i>varchar(1024)</i>	Notes for departure address
dst_address_notes	<i>varchar(1024)</i>	Notes for delivery address
extra_cost	<i>float</i>	Additional expenses,
final_pay	<i>float</i>	Final payment amount
prepayment	<i>float</i>	Advance payment amount
amount	<i>float</i>	Total document amount
weight	<i>float</i>	Total weight of cargo in document
transp_cost	<i>float</i>	Cost of transportation
extra_cost_notes	<i>varchar(1024)</i>	Additional expenses justification
final_pay_at	<i>varchar(50)</i>	Date and time of final payment, format "yyyy-mm-ddThh:mm:ss.sss"
prepaid_at	<i>varchar(50)</i>	Date and time of advance payment, format "yyyy-mm-ddThh:mm:ss.sss"
estimated_arrival	<i>varchar(50)</i>	Date and time of estimated arrival, format "yyyy-mm-ddThh:mm:ss.sss"
estimated_delivery_duration	<i>float</i>	Estimated delivery duration, in minutes
self_delivery	<i>boolean</i>	Document attribute determines that cargo is delivering by one of the counterparties
is_del	<i>integer</i>	Document deletion attribute, possible values: 0 - Normal, 1 - Deleted
reject	<i>integer</i>	Document signature rejected attribute, possible values: 0 - Normal, 1 - Rejected
draft	<i>integer</i>	Document draft state attribute, possible values: 0 - Normal, 1 - Draft

is_dangerous	<i>integer</i>	Document attribute which determines that cargo is dangerous, possible values: false - Normal, true - Cargo is dangerous
is_heavyweight	<i>boolean</i>	Document attribute which determines that cargo is overweighted, possible values: false - Normal, true - Cargo is overweighted
is_oversized	<i>boolean</i>	Document attribute which determines that cargo is oversized, possible values: false - Normal, true - Cargo is oversized
is_reloading_prohibited	<i>boolean</i>	Document attribute which determines that cargo can be reloaded to another vehicle, possible values: false - Can be reloaded true - Reloading is prohibited
shipper_email	<i>varchar(250)</i>	Email of shipper
carrier_email	<i>varchar(250)</i>	Email of carrier
consignee_email	<i>varchar(250)</i>	Email of consignee
src_address	<i>varchar(1024)</i>	Source address
shipper_sign	<i>varchar(250)</i>	Document signature of shipper
carrier_sign	<i>varchar(250)</i>	Document signature of carrier
consignee_sign	<i>varchar(250)</i>	Document signature of consignee
rejected_at	<i>varchar(50)</i>	Date and time when document was rejected, format "yyyy-mm-ddThh:mm:ss.sss"
shipper_signed_at	<i>varchar(50)</i>	Date and time when document was signed by shipper, format "yyyy-mm-ddThh:mm:ss.sss"
carrier_signed_at	<i>varchar(50)</i>	Date and time when document was signed by carrier, format "yyyy-mm-ddThh:mm:ss.sss"
consignee_signed_at	<i>varchar(50)</i>	Date and time when document was signed by consignee, format "yyyy-mm-ddThh:mm:ss.sss"
lic_num	<i>varchar(50)</i>	Transportation licence number
lic_exp_date	<i>varchar(50)</i>	Licence expiration date, format "yyyy-mm-dd",
lic_type	<i>integer</i>	Type of licence
lic_type_name	<i>varchar(50)</i>	Licence type name
rejected_by_obj_id	<i>integer</i>	Counterparty identifier which reject document signing
dst_address	<i>varchar(1024)</i>	Destination address
shipper_name	<i>varchar(250)</i>	Shipper name
shipper_tin	<i>varchar(50)</i>	Shipper tax identification number
carrier_name	<i>varchar(250)</i>	Carrier name

carrier_tin	<i>varchar(50)</i>	-Carrier tax identification number
consignee_name	<i>varchar(250)</i>	- Consignee name
consignee_tin	<i>varchar(250)</i>	- Consignee tax identification number
shipper_bank_details	<i>text</i>	- Bank details of shipper
carrier_bank_details	<i>text</i>	- Bank details of carrier
consignee_bank_details	<i>text</i>	Bank details of consignee
vat_prc	<i>float</i>	- Percent of VAT
vat_additional	<i>boolean</i>	VAT additional attribute, possible values: true - VAT additional to Extra costs false - VAT included in Extra costs
extra_cost_vat	<i>float</i>	VAT for extra_cost,
paid_vat	<i>float</i>	Paid VAT amount,
vat_paid_at	<i>varchar(50)</i>	Date and time of VAT payment, format "yyyy-mm-ddThh:mm:ss.sss",
vat_to_pay	<i>float</i>	Amount of VAT to pay
prepayment_vat	<i>float</i>	Amount of VAT for advance payment amount
final_pay_vat	<i>float</i>	Amount of VAT for final payment amount
shipper_is_legal	<i>boolean</i>	Shipper type attribute, possible values: true – legal false – individual
consignee_is_legal	<i>boolean</i>	Consignee type attribute, possible values: true - legal false – individual
carrier_is_legal	<i>boolean</i>	Shipper type attribute, possible values: true - legal false – individual
status	<i>integer</i>	Document status, possible values: 1 - not signed, 2 - waiting for own signature, 3 - waiting for counterparties signature, 4 - signed by all, 5 - signature rejected, 6 - on the way, 7 - delivered, 8 - refused to accept, 9 - accepted by driver, 10 - delivered, not confirmed
shipper_employee_name	<i>varchar(250)</i>	Name of shipper's employee who sign the document
shipper_employee_id_card	<i>varchar(250)</i>	ID card of shipper's employee who sign the document
carrier_employee_name	<i>varchar(250)</i>	Name of carrier's employee who sign the document
carrier_employee_id_card	<i>varchar(250)</i>	ID card of carrier's employee who sign the document

consignee_employee_name	<i>varchar(250)</i>	Name of consignee's employee who sign the document
consignee_employee_id_card	<i>varchar(250)</i>	ID card of consignee's employee who sign the document
car_num	<i>varchar(50)</i>	Vehicle state number <i>varchar(50)</i> ,
car_model	<i>varchar(250)</i>	Vehicle model name
car_carrying	<i>float</i>	Vehicle load capacity
trailer_num	<i>varchar(50)</i>	Trailer state number
trailer_model	<i>varchar(250)</i>	Trailer model name
trailer_carrying	<i>float</i>	Trailer load capacity
driver_id	<i>integer</i>	Identifier of driver
driver_name	<i>varchar(250)</i>	Driver name,
driver_id_card	<i>varchar(50)</i>	ID card of driver
forwarder_name	<i>varchar(250)</i>	Forwarder name
forwarder_id_card -	<i>varchar(50)</i>	ID card of forwarder
items	<i>array_of_objects</i>	List of products
Product object parameters	id	<i>integer</i> Record identifier
	grp_id	<i>integer</i> Product group identifier
	unit_id	<i>integer</i> Unit of measure identifier
	item_name	<i>varchar(1024)</i> Product name
	item_code	<i>varchar(250)</i> Product code
	cnt	<i>float</i> Product quantity
	received_cnt	<i>float</i> Product shipped quantity
	weight	<i>float</i> Product weight
	amount	<i>float</i> Product cost
	places	<i>integer</i> Number of places
	place_num	<i>varchar(50)</i> Place name
	grp_name	<i>text</i> Product HS code description
	unit_name	<i>varchar(250)</i> Unit of measure name
	grp_code	<i>varchar(50)</i> HS code

Example request:

```
POST /doc_card/
Content-Type: application/json
{
  "id": 653
}
```

Example response:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "id": 653,
  "num": "200000000653",
  "dat": "2023-01-30T15:35:37.073",
  "payer": 1,
  "created_by_obj_id": 20,
```

```

"upd_time": "2023-03-17T11:17:34.674",
"tax_invoice_num": "54Y123TE",
"distance": 13.3,
"route_list_position": 1,
"arrival": null,
"departure": "2023-01-30T16:10:33.127",
"dst_latitude": 48.4783735,
"dst_longitude": 34.9094779,
"src_latitude": 48.4657299,
"src_longitude": 35.0596458,
"current_latitude": 48.478963,
"current_longitude": 34.909152,
"notes": "",
"car_id": 163,
"trailer_id": 101,
"shipper_id": 20,
"consignee_id": 19,
"carrier_id": 20,
"ready_to_departure": "2023-01-30T16:09:58.714",
"arrival_not_confirmed": null,
"insurance_notes": "Instructions for cargo insuranceInstructions for cargo insurance",
"acceptance_notes": null,
"dangerous_notes": "Instructions for cargoInstruction",
"src_address_notes": "TECT 1TECT 1TECT 1TECT 1TECT 1TECT 1TECT 1TECT 1TECT 1TECT 1TECT",
"dst_address_notes": "TECT - 1TECT - 1TECT - 1TECT - 1TECT - 1TECT - 1TECT - 1TECT - 1TECT",
"extra_cost": 2344.0,
"final_pay": 0.0,
"prepayment": 13024.0,
"amount": 9340.46,
"weight": 162.0,
"transp_cost": 10680.0,
"extra_cost_notes": "TTTTTTTTTTTTTTTTTTTTTTTTTTTTTTTTTTTTTTTT",
"final_paid_at": null,
"prepaid_at": null,
"estimated_arrival": "2023-01-30T20:52:33.127",
"estimated_delivery_duration": 282.0,
"step": 0,
"self_delivery": false,
"is_del": 0,
"reject": 0,
"draft": 0,
"is_dangerous": true,
"is_heavyweight": true,
"is_oversized": true,
"is_reloading_prohibited": true,
"shipper_email": "foo@gmail.com",
"consignee_email": "bar@me.com",
"carrier_email": "foo@gmail.com",
"src_address": "Lyvarna St, 8-10, ",
"src_city_name": null,
"src_country_id": null,
"src_region_id": null,
"shipper_sign":
"nxWE/9K+S0XjtxxeDa0/Nz596bF4DBwyJPew25ewWPkotQ/RHtzlbUiZq0V1MWi97IR+B7hVN2Ay7phRCILB2
JEBJdsZoxXR2rQTdIMovy0Sr3F7A5KsgTsIJAxflHs7l2ZYjPjxChkr5kA3fNjleaTsJnC9eOiZhUogGGORzOA=",
"consignee_sign": "a93329ca59ee6e0cab9b45bc700935f2427cc7ed",

```

```

"carrier_sign":
"nxWE/9K+SOXjtxxeDa0/Nz596bF4DBwyJPew25ewWPkotQ/RHtzIbUiZq0V1MWi97IR+B7hVN2Ay7phRCILB2
JEBJdsZoxXR2rQTdIMovy0Sr3F7A5KsgTslJAxfLHs7I2ZYjPjxChkr5kA3fNjleaTsJnC9eOiZhUogGGORzOA=",
"rejected_at": null,
"shipper_signed_at": "2023-01-30T15:45:58.228",
"carrier_signed_at": "2023-01-30T15:45:58.228",
"consignee_signed_at": "2023-01-30T15:50:56.648",
"lic_num": "DMY-44120",
"lic_exp_date": null,
"lic_type": 5,
"lic_type_name": "Yük",
"shipper_passport": "",
"carrier_passport": "",
"consignee_passport": "P-1234",
"rejected_by_obj_id": null,
"dst_address": "Monitorna St, 2, ",
"dst_city_name": null,
"dst_country_id": null,
"dst_region_id": null,
"shipper_name": "john",
"shipper_tin": "123456789",
"carrier_name": "john",
"carrier_tin": "123456789",
"consignee_name": "john",
"consignee_tin": "0012345",
"shipper_chief_name": "john",
"carrier_chief_name": "john",
"consignee_chief_name": "john",
"shipper_bank_details": "Test Bank Address",
"carrier_bank_details": "Test Bank Address",
"consignee_bank_details": "Test Bank details to test test test test test test test test test est ett
e11665321l453 ",
"vat_prc": 0.0,
"vat_additional": false,
"extra_cost_vat": 0.0,
"paid_vat": 0.0,
"vat_paid_at": null,
"vat_to_pay": 0.0,
"prepayment_vat": 0.0,
"final_pay_vat": 0.0,
"shipper_is_legal": true,
"consignee_is_legal": false,
"carrier_is_legal": true,
"status": 6,
"dst_country_name": null,
"src_country_name": null,
"dst_region_name": null,
"src_region_name": null,
"shipper_employee_name": "john",
"carrier_employee_name": " john ",
"consignee_employee_name": " john ",
"shipper_employee_id_card": "0012345",
"shipper_employee_passport": "",
"shipper_employee_email": "foo@gmail.com",
"carrier_employee_id_card": "0012345",
"carrier_employee_passport": "",
"carrier_employee_email": "foo@gmail.com",

```

```

"consignee_employee_id_card": "0012345",
"consignee_employee_passport": "P-1234",
"consignee_employee_email": "bar@gmail.com",
"car_num": "01CH401",
"trailer_num": "21312",
"car_maker": "AC",
"car_model": "378 GT Zagato",
"trailer_maker": "Acura",
"trailer_model": "CSX",
"car_carrying": 6.4,
"trailer_carrying": 23.0,
"driver_name": "Adam",
"forwarder_name": "",
"forwarder_id_card": "",
"receiver_name": "",
"driver_id_card": "0012348",
"driver_passport": "",
"receiver_id_card": "",
"receiver_passport": "",
"items": [
  {
    "id": 462,
    "grp_id": 15255,
    "unit_id": 1,
    "item_name": "TECT - 1 CARGO 1TECT - 1 CARGO 1TECT - 1 CARGO 1TECT - 1 CARGO 1 ",
    "item_code": "5551",
    "cnt": 14.0,
    "received_cnt": 0.0,
    "amount": 6790.23,
    "weight": 120.0,
    "places": 21,
    "place_num": "412",
    "grp_name": "0105 mal mövqeyində göstərilən ev quşlarının əti və ət əlavələri, təzə, soyudulmuş və
ya dondurulmuş:– ev toyuqlarının (Gallus domesticus):– – cəmdək hissələri və ət əlavələri, dondurulmuş:– –
– cəmdək hissələri:– – – – sümükdən ayrılmamışlar:– – – – belləri, boyunları, belləri boynu ilə birgə,
büzdümləri və qanadların nazik ucları",
    "grp_code": "0207144000",
    "unit_name": "kisə"
  },
  {
    "id": 463,
    "grp_id": 15257,
    "unit_id": 3,
    "item_name": "TECT - 1 CARGO 2",
    "item_code": "25",
    "cnt": 11.0,
    "received_cnt": 0.0,
    "amount": 210.23,
    "weight": 40.0,
    "places": 5252,
    "place_num": "52",
    "grp_name": "0105 mal mövqeyində göstərilən ev quşlarının əti və ət əlavələri, təzə, soyudulmuş və
ya dondurulmuş:– ev toyuqlarının (Gallus domesticus):– – cəmdək hissələri və ət əlavələri, dondurulmuş:– –
– cəmdək hissələri:– – – – sümükdən ayrılmamışlar:– – – – budlar və onlardan parçalar",
    "grp_code": "0207146000",
    "unit_name": "qutu"
  }
],

```

```

{
  "id": 464,
  "grp_id": 15256,
  "unit_id": 4,
  "item_name": "Instructions for cargo insurance3",
  "item_code": "234",
  "cnt": 141.0,
  "received_cnt": 0.0,
  "amount": 2340.0,
  "weight": 2.0,
  "places": 234,
  "place_num": "234",
  "grp_name": "0105 mal mövqeyində göstərilən ev quşlarının əti və ət əlavələri, təzə, soyudulmuş və ya dondurulmuş:– ev toyuqlarının (Gallus domesticus):– – cəmdək hissələri və ət əlavələri, dondurulmuş:– – – cəmdək hissələri:– – – – sümükdən ayrılmamışlar:– – – – döş və onlardan parçalar",
  "grp_code": "0207145000",
  "unit_name": "ədəd"
}
]
}

```

Qaimə yarat və ya yenilə

Metod yeni qaimə əlavə etməyə və ya mövcud olanı yeniləməyə imkan verir.

Endpoint: `/save_hd_doc/`

HTTP Method: POST

Authorization: Bearer <token>

Request parameters:

Parameter	Type	Description
id	<i>integer</i>	Document identifier 0 – creating a new waybill >0 – updating existing waybill
doc_type_id	<i>integer</i>	Document type identifier (see doc_types endpoint)
payer	<i>integer</i>	Payer attribute, possible values: 1 - Shipper, 2 - Consignee
dst_latitude	<i>float</i>	Latitude of destination address
dst_longitude	<i>float</i>	Longitude of destination address
src_latitude	<i>float</i>	Latitude of source address
src_longitude	<i>float</i>	Longitude of source address
current_latitude	<i>float</i>	Current latitude value
current_longitude	<i>float</i>	Current longitude value
notes	<i>varchar(250)</i>	Document notes
shipper_id	<i>integer</i>	Identifier of shipper
consignee_id	<i>integer</i>	Identifier of consignee
carrier_id	<i>integer</i>	Identifier of carrier
insurance_notes	<i>varchar(1024)</i>	Insurance information
acceptance_notes	<i>varchar(1024)</i>	Acceptance information
dangerous_notes	<i>varchar(1024)</i>	Notes for dangerous cargo
src_address_notes	<i>varchar(1024)</i>	Notes for departure address
dst_address_notes	<i>varchar(1024)</i>	Notes for delivery address
extra_cost	<i>float</i>	Additional expenses,
final_pay	<i>float</i>	Final payment amount
prepayment	<i>float</i>	Advance payment amount
transp_cost	<i>float</i>	Cost of transportation
extra_cost_notes	<i>varchar(1024)</i>	Additional expenses justification
estimated_delivery_duration	<i>float</i>	Estimated delivery duration, in minutes
self_delivery	<i>boolean</i>	Document attribute determines that cargo is delivering by one of the counterparties
is_dangerous	<i>integer</i>	Document attribute which determines that cargo is dangerous, possible values: false - Normal, true - Cargo is dangerous

is_heavyweight	<i>boolean</i>	Document attribute which determines that cargo is overweighted, possible values: false - Normal, true - Cargo is overweighted
is_oversized	<i>boolean</i>	Document attribute which determines that cargo is oversized, possible values: false - Normal, true - Cargo is oversized
is_reloading_prohibited	<i>boolean</i>	Document attribute which determines that cargo can be reloaded to another vehicle, possible values: false - Can be reloaded true - Reloading is prohibited
shipper_email	<i>varchar(250)</i>	Email of shipper
carrier_email	<i>varchar(250)</i>	Email of carrier
consignee_email	<i>varchar(250)</i>	Email of consignee
src_address	<i>varchar(1024)</i>	Source address
shipper_sign	<i>varchar(250)</i>	Document signature of shipper
lic_num	<i>varchar(50)</i>	Transportation licence number
lic_exp_date	<i>varchar(50)</i>	Licence expiration date, format "yyyy-mm-dd",
lic_type	<i>integer</i>	Type of licence
lic_type_name	<i>varchar(50)</i>	Licence type name
dst_address	<i>varchar(1024)</i>	Destination address
shipper_name	<i>varchar(250)</i>	Shipper name
shipper_tin	<i>varchar(50)</i>	Shipper tax identification number
carrier_name	<i>varchar(250)</i>	Carrier name
carrier_tin	<i>varchar(50)</i>	-Carrier tax identification number
consignee_name	<i>varchar(250)</i>	- Consignee name
consignee_tin	<i>varchar(250)</i>	- Consignee tax identification number
vat_prc	<i>float</i>	- Percent of VAT
vat_additional	<i>boolean</i>	VAT additional attribute, possible values: true - VAT additional to Extra costs false - VAT included in Extra costs
extra_cost_vat	<i>float</i>	VAT for extra_cost,
car_id	<i>varchar(50)</i>	Vehicle state number <i>varchar(50)</i> ,
trailer_id	<i>varchar(50)</i>	Trailer state number
driver_id	<i>integer</i>	Identifier of driver
forwarder_name	<i>varchar(250)</i>	Forwarder name
forwarder_id_card -	<i>varchar(50)</i>	ID card of forwarder

Response:

The response returns document parameters the same as for endpoint `/doc_card/`

Example request:

```
POST /save_hd_doc/  
Content-Type: application/json  
{  
  "id": 0,  
  "shipper_id": 20,  
  "carrier_id": 20,  
  "consignee_id": 20,  
  "doc_type_id": 2  
}
```

Example response:

```
HTTP/1.1 200 OK  
Content-Type: application/json  
  
{  
  "id": 4555,  
  "num": "NQMQ-2000000004555",  
  "dat": "2024-03-18T15:01:37.169",  
  "payer": 1,  
  "created_by_obj_id": 20,  
  "upd_time": "2024-03-18T15:01:37.180",  
  "tax_invoice_num": null,  
  "distance": 0,  
  "route_list_position": 0,  
  "doc_type_id": 2,  
  "doc_type_name": "Malların bir vergi ödəyicisindən digər vergi ödəyicisinə qaytarılması ilə bağlı  
daşınması",  
  "doc_type_attr": 0,  
  "container_name": null,  
  "arrival": null,  
  "departure": null,  
  "dst_latitude": -1,  
  "dst_longitude": -1,  
  "src_latitude": -1,  
  "src_longitude": -1,  
  "current_latitude": -1,  
  "current_longitude": -1,  
  "notes": "",  
  "car_id": null,  
  "trailer_id": null,  
  "shipper_id": 20,  
  "consignee_id": 20,  
  "carrier_id": 20,  
  "ready_to_departure": null,  
  "arrival_not_confirmed": null,  
  "insurance_notes": null,  
  "acceptance_notes": null,  
  "dangerous_notes": null,  
  "src_address_notes": null,  
  "dst_address_notes": null,  
  "extra_cost": 0,  
  "final_pay": 0,  
}
```

```
"prepayment": 0,
"amount": 0,
"weight": 0,
"transp_cost": 0,
"extra_cost_notes": null,
"cancel_notes": null,
"parent_doc_id": null,
"parent_doc_num": null,
"final_paid_at": null,
"prepaid_at": null,
"estimated_arrival": null,
"estimated_delivery_duration": 0,
"step": 1,
"self_delivery": false,
"is_del": 0,
"reject": 0,
"cancel": 0,
"draft": 0,
"is_dangerous": false,
"is_heavyweight": false,
"is_oversized": false,
"is_reloading_prohibited": false,
"shipper_email": "foo@bar.com",
"consignee_email": "foo@bar.com",
"carrier_email": "foo@bar.com",
"src_address": null,
"src_city_name": null,
"src_country_id": null,
"src_region_id": null,
"shipper_sign": "",
"consignee_sign": "",
"canceled_at": null,
"carrier_sign": "",
"receiver_sign": "",
"rejected_at": null,
"shipper_signed_at": null,
"carrier_signed_at": null,
"consignee_signed_at": null,
"receiver_signed_at": null,
"lic_num": null,
"lic_exp_date": null,
"lic_type": null,
"lic_type_name": null,
"shipper_passport": "",
"carrier_passport": "",
"consignee_passport": "",
"rejected_by_obj_id": null,
"driver_id": null,
"canceled_by_obj_id": null,
"created_by_employee_id": 254,
"dst_address": null,
"dst_city_name": null,
"dst_country_id": null,
"dst_region_id": null,
"shipper_name": "JOHN",
"shipper_tin": "1234567890",
"carrier_name": "JOHN",
```

```

"carrier_tin": "1234567890",
"consignee_name": "JOHN",
"consignee_tin": "1234567890",
"shipper_chief_name": "JOHN",
"carrier_chief_name": "JOHN",
"consignee_chief_name": "JOHN",
"shipper_bank_details": "this is a bank details @13 2111",
"carrier_bank_details": "this is a bank details @13 2111",
"consignee_bank_details": "this is a bank details @13 2111",
"accompanying_documents": null,
"shipper_code": null,
"consignee_code": null,
"estimated_departure": null,
"vat_prc": 0,
"vat_additional": false,
"extra_cost_vat": 0,
"paid_vat": 0,
"vat_paid_at": null,
"vat_to_pay": 0,
"prepayment_vat": 0,
"final_pay_vat": 0,
"shipper_is_legal": true,
"consignee_is_legal": true,
"carrier_is_legal": true,
"status": 1,
"dst_country_name": null,
"src_country_name": null,
"dst_region_name": null,
"src_region_name": null,
"shipper_employee_name": "",
"carrier_employee_name": "",
"consignee_employee_name": "",
"shipper_employee_id_card": "",
"shipper_employee_passport": "",
"shipper_employee_email": "",
"carrier_employee_id_card": "",
"carrier_employee_passport": "",
"carrier_employee_email": "",
"consignee_employee_id_card": "",
"consignee_employee_passport": "",
"consignee_employee_email": "",
"car_num": "",
"trailer_num": "",
"car_maker": "",
"car_model": "",
"trailer_maker": "",
"trailer_model": "",
"car_carrying": null,
"trailer_carrying": null,
"driver_name": "",
"forwarder_name": null,
"forwarder_id_card": null,
"receiver_name": "",
"cancel_empl_name": "",
"driver_id_card": "",
"cancel_empl_id_card": "",
"driver_passport": "",

```

```
"receiver_id_card": "",  
"receiver_passport": "",  
"items": []  
}
```

Qaiməni sil

Metod mövcud qaiməni silməyə imkan verir.

Endpoint: `/del_hd_doc/`

HTTP Method: POST

Authorization: Bearer <token>

Request parameters:

Parameter	Type	Description
id	<i>integer</i>	Document identifier

Response:

Parameter	Type	Description
status	<i>varchar(50)</i>	Status of request, possible values success – in case of successful deleting error – in case of error
message	<i>varchar(1024)</i>	Detailed information about result

Example request:

```
POST / del_hd_doc/  
Content-Type: application/json  
{  
  "id": 4555  
}
```

Example response:

```
HTTP/1.1 200 OK  
Content-Type: application/json  
  
{  
  "status": "error",  
  "message": "Can't delete signed document"  
}
```

Ölçü vahidlərini əldə et

Metod ölçü vahidlərinin siyahısını qaytarır.

Endpoint: */units/*

HTTP Method: POST

Authorization: Bearer <token>

Request parameters (optional):

Parameter	Type	Description
name	<i>varchar(250)</i>	Name of unit

Response:

The response returns a list of units

Parameter	Type	Description
id	<i>integer</i>	Unique identifier of unit
name	<i>varchar(250)</i>	Name of unit

Example request:

```
POST /units/  
Content-Type: application/json  
{  
  "name": "İa"  
}
```

Example response:

```
HTTP/1.1 200 OK  
Content-Type: application/json  
{  
  "total": 3,  
  "items": [  
    {  
      "id": 75,  
      "name": "Ampula"  
    },  
    {  
      "id": 66,  
      "name": "Bağlama"  
    },  
    {  
      "id": 76,  
      "name": "Flakon"  
    }  
  ]  
}
```

HS kodlarını əldə et

Metod mövcud HS kodlarının siyahısını qaytarır.

Endpoint: */groups/*

HTTP Method: POST

Authorization: Bearer <token>

Request parameters:

Parameter	Type	Description
code	<i>varchar(250)</i>	HS code value
name	<i>varchar(250)</i>	HS code description

Response:

The response returns a list of HS codes

Parameter	Type	Description
id	<i>integer</i>	Unique identifier
code	<i>varchar(250)</i>	HS code value
name	<i>text</i>	HS code description

Example request:

```
POST /groups/
Content-Type: application/json
{
  "code": "0207144000"
}
```

Example response:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "total": 1,
  "items": [
    {
      "id": 15255,
      "code": "0207144000",
      "name": "0105 mal mövqeyində göstərilən ev quşlarının əti və ət əlavələri, təzə, soyudulmuş və ya dondurulmuş:— ev toyuqlarının (Gallus domesticus):— cəmdək hissələri və ət əlavələri, dondurulmuş:— cəmdək hissələri:— sümükdən ayrılmamışlar:— belləri, boyunları, belləri boynu ilə birləşə, bütünlükləri və qanadların nazik ucları"
    }
  ]
}
```

Qaimə qeydləri əlavə et və ya yenilə

Metod qaiməyə yeni bir qeyd əlavə etməyə və ya mövcud olanı yeniləməyə imkan verir.

Endpoint: `/save_rc_doc /`

HTTP Method: POST

Authorization: Bearer <token>

Request parameters:

Parameter	Type	Description
id	<i>integer</i>	Record identifier 0 – creating a new record >0 – updating existing record
doc_id	<i>integer</i>	Document type identifier (see doc_types endpoint)
grp_id	<i>integer</i>	Product group identifier
unit_id	<i>integer</i>	Unit of measure identifier
item_name	<i>varchar(1024)</i>	Product name
item_code	<i>varchar(250)</i>	Product code
cnt	<i>float</i>	Product quantity
weight	<i>float</i>	Product weight
amount	<i>float</i>	Product cost
places	<i>integer</i>	Number of places
place_num	<i>varchar(50)</i>	Place name
grp_name	<i>text</i>	Product HS code description
unit_name	<i>varchar(250)</i>	Unit of measure name
grp_code	<i>varchar(50)</i>	HS code

Response:

Parameter	Type	Description
id	<i>integer</i>	Record identifier
doc_id	<i>integer</i>	Document type identifier (see doc_types endpoint)
grp_id	<i>integer</i>	Product group identifier
unit_id	<i>integer</i>	Unit of measure identifier
item_name	<i>varchar(1024)</i>	Product name
item_code	<i>varchar(250)</i>	Product code
cnt	<i>float</i>	Product quantity
weight	<i>float</i>	Product weight
amount	<i>float</i>	Product cost
places	<i>integer</i>	Number of places
place_num	<i>varchar(50)</i>	Place name
grp_name	<i>text</i>	Product HS code description
unit_name	<i>varchar(250)</i>	Unit of measure name

grp_code	varchar(50)	HS code
----------	-------------	---------

Example request:

```
POST /save_rc_doc/
Content-Type: application/json
{
  "doc_id": 3768,
  "grp_id": 15255,
  "item_code": "1234",
  "item_name": "test_assort",
  "unit_id": 75,
  "cnt": 6,
  "weight": 7000,
  "place_num": "2A",
  "places": 5,
  "amount": 121.2
}
```

Example response:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "id": 1352,
  "parent_rec_id": null,
  "grp_id": 15255,
  "item_name": "test_assort",
  "item_code": "1234",
  "unit_id": 75,
  "cnt": 6,
  "price": 20.2,
  "amount": 121.2,
  "weight": 7000,
  "places": 5,
  "place_num": "2A",
  "qr_code": null,
  "doc_id": 3768,
  "received_cnt": 0,
  "import_series": null,
  "import_doc_type": null,
  "import_num": null,
  "grp_name": "0105 mal mövqeyində göstərilən ev quşlarının əti və ət əlavələri, təzə, soyudulmuş və ya dondurulmuş:– ev toyuqlarının (Gallus domesticus):– – cəmdək hissələri və ət əlavələri, dondurulmuş:– – – cəmdək hissələri:– – – – sümükdən ayrılmamışlar:– – – – belləri, boyunları, belləri boynu ilə birgə, büzdümləri və qanadların nazik ucları",
  "grp_code": "0207144000",
  "unit_name": "Ampula"
}
```

Qaimə qeydini sil

Metod mövcud qaimə qeydini silməyə imkan verir.

Endpoint: `/del_rc_doc/`

HTTP Method: POST

Authorization: Bearer <token>

Request parameters:

Parameter	Type	Description
id	<i>integer</i>	Record identifier
doc_id	<i>integer</i>	Document identifier

Response:

Parameter	Type	Description
status	<i>varchar(50)</i>	Status of request, possible values success – in case of successful deleting error – in case of error
message	<i>varchar(1024)</i>	Detailed information about result

Example request:

```
POST / del_hd_doc/  
Content-Type: application/json  
{  
  "id": 1355,  
  "doc_id": 3768  
}
```

Example response:

```
HTTP/1.1 200 OK  
Content-Type: application/json  
  
{  
  "status": "success"  
}
```

Qaimə üçün imzalama sorğusu göndər

Metod qaimənin imzalanmasını başlatmağa imkan verir.

Endpoint: */sign_doc/*

HTTP Method: POST

Authorization: Bearer <token>

Request parameters:

Parameter	Type	Description
id	<i>integer</i>	Document identifier
sign_type	<i>varchar(10)</i>	Sign type , possible values: imza – Asan sign sima – Sima sign
upd_time	<i>varchar(20)</i>	Current timestamp , format yyyy-MM-ddhh:mm:ss.fff

Response:

Parameter	Type	Description
status	<i>varchar(50)</i>	Status of request, possible values success – in case of successful request error – in case of error
message	<i>varchar(1024)</i>	Detailed information about result
code	<i>text</i>	In case of sima – qr code in base64 imza – code of signature request
sign_status	<i>varchar(20)</i>	Signing status

Example request:

```
POST /sign_doc/
Content-Type: application/json
{
  "id": 4578,
  "upd_time": "2024-03-31T15:55:41.425",
  "sign_type": "sima"
}
```

Example response:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
```

```
"status": "success",
"code": "data:image/png;base64,
iVBORw0KGgoAAAANSUhEUgAAAI4AAAluAQAACwMb5yAAAIfoIEQVR4nO2cQY7rOAxECEgAOZKu7iPIAAI4
FI9Rdj5mNTPSbBgE3WnHeVnlpFus3/i8ewwhSmMIUpTGF2YWW+un2u+fN+3C8+V/vO18P6/aJ9zb99xAnjc3
9ovuVx/H60wpzC3L/nWfOd+8+rzef9zmS3+BIYI77hfvcmeQDu43y8MlcwX2sT0+PAXMZy1bnaN/X+yVtzhYPB
OZMxL4pemOOYez3n8s4/fUbhXPxYWB3kcx9vWuerMP8PZgbcPGvG6MQYcRIUV37lcohrYV40hTmMURLNwz
M0Zx6NtTX2vYjLucjzooH3WfC/ycWF2YbJlFWHT7M/9U1hNmJ4RFCSSi8CLIKpAjH+jEWeoSx1+5v2C7Mdg7SP98
1S5yM+owiYabVIWr2j1r+A/wzNwuzGoBnRjzNfzsc8t6FWYmCzLS8LbIKUSP7CnMJEjTWTomehjJxk/SNSHyS6Pu
JPiVCYExi8DT5Kasw6bEbkQEt+5IjM6meR8TueO2ahdmNIQpvBsihUyaPXW4ufojHkV84tCvebICFOYVRgsQszE
pLtTjP0uKjLaq36XMgZCbVC3MMw+nSGux+MnTN2dkkG6cZHN95cQmk3ViYQxjHu11xGWHnqfSxDCM0r7Dkr
5ZszvHCnMksBUflrxWWiSjJf0mwmP5McGH0YUaeFT/n2objbiNjMTJJoqJKIXURKy68qzDGMsUTy9EbWzeEgkl
O7+pMRviTRMyAKrOX2C/MZgzlV8tWZKTGjGLOmXpzc/nd2AITC/MKcwg/rKHTyAqWWJKxeKjTQZBTPOkMG
cxlQk5i62MsLOHxOMjr5fc2VQBLPuwMNsx+E/pEV5a/whNziWbhmWISJ0v4pt/c3Fh9mlcffHV2g4t40VxRvo0z
TTJXlWKAfHZvTCnMCOHzhDvvNnWgIYMj/cGaKExO7BWMFOYECYqyOjqNynHtN6dPthL6Wsc0KfWLMwJTDgc
8gWVO9VfCwNMBTNisU4zqMV5hRGRu8XQF+Gbli/xsgngzN4IfyMAFWjsjBnMFq4I5DHFzTxGGtyHclB3XVOY
Y5hRg6XtTSiOPVUaa7hCyl91/iGte8SmIU5iInIC8Bc8CZRUM7TcyQSKl6jZ0ldmGOYXN75IHFskDWNacRxyZa+2i
me31yYYxi5GuoJk48aju/MnV2fMLR/7IFZq70s+cJsx6SlgWbU09LIHfKlui/Dg5ogQvO3gC7MXkzLG0S3mPZaY
wYq037a4UjrpVK58c+LMx2zMGk2jRBQ5V8aWez7jZw1fFU7E73rtmYTZjTDpRhkeGjt78lb6UIUYQL7TCcDu8M
KcwxFmc5WbpCzJzEfiM1A7GY8YT8QLcxAjWzfnAddU2hql8Yc6l3Jw5zcx/X3KssLsxjQFnIow7XISLBGCSciyfvN
OkYF/b4U5h6ErooyoexyVSlvscpadSYKVR6J6fptShdmNUfc+XduWbeGlwsfQSC8KDzi9kN/pw8JsxmCxd8txmKE
mpEmwmE4bOTAYj6tperowhzC8o85V+oltR9ftGtKf+CKZQbM4K8wRTPyOolyqy6IPyZKmj2taZlnHaGAYp/a2O
gqzHXMTlFyfkdBei5ymhdfak1MKcwUg2ZsvRI6hkoCZVJGW0aa8jQGOFLMwpTJZfkoRNHiFqxX4rMA2gGekz
eilemHMYy8PrJyMLkUvUX8tawoLZH8p2YozGYMpnvLrojllylKASjyxtK/yLR8oWFOYZpuu+qD9wOI9EblZgyP
Od0My4p1zJwC3MGk5MXI5v5WknVavlpXRQXz5Qt3QtzCuM5qqkevrY+ycnVJzHdSyclw2uKgMlcwrhMKV4b4
+3R9jepj04INsoyPp3DaIU5hjENqqe5S0M43VwpSgZvmfT8rB2yZ4VdmCOYWEzLnnAsZm9ZWLmn5HEBxrpJ68
eFLMxezMhbTmOFSaddR9LfbRqRdoyr+GikVb8KcwyTjXqdhYq01/BgU++r+xOsfLr/TB8WZj/GHpsQu73jwZvuW
bKRIOBclKw5KrK3wpzCWMxKhxlp/F2rk+8ZrBTWbU3WMJL2hzApzGaM543aSMV0E02BqBsOWG3cDtnACtbC
nMJIgDjm7mXrfqyX0I8NScVbR0z3KPTCHMNYOhzuj03ocnm5Fh7xKl35mqYpzDEMxpJrPFC2blqJV8tZaXuGBNn
O2Ce7F+YUxiUS2db6Mgg9+/9sd5kyr5H/WluSuhXmFEayMe4LiaQolzfSp/MN4zVFyFK7OI1XY5hcuPKw9+eml
E+oue0YNhRNEzCF/lZ8MJsx6QkVDVsXKj7qptb/tcEDKRGP7fQUIB7YU5hyKPAWEMUJQpRi7xuVkhTKi4QjhTmE
Ga1StYONIZ73/QY61/I6P+RmH4+ZVlh9mO4PQ7Xlhy5brRiLDc8RdNADYpSzZP2GkYrzG6MZfUcYr+HBskXZFPk
5FcPk6j1VJdemGMYk0ik9pKnq6sAS6MjMInOkZeG542PhTmEUSPL0SCe7ZGRGx1ulhqf/a3J9vDf0CzMZsyFck
mRk4dGuHkiuied5CgXDjhtd0VZjtmrAWXqHdPnQiSotmYVgthsvT+sMKcwxCUJEvPYdsQjvkps91bCBOy6WAk7
WnyF2Y7hoetWc4IO30u86gxjBbXAgcd/agBqMKcWLC2I+0Np/aiP6yg1B5o/DMSJ5SxrwpxDkNopvXeSaWBIEK
OdHlJql+czEG2whzCqJnvQ2ISL+R8hIS0PEIBbekNR7AW5jymczhj0dgGh6IVQoAq68Y18kqihTmEGdnLsteEIF196
rZYWOVX/ypGX2K/MPsxsXpr78KC8rSdMKjobo2cACW/WkqYwpzBIEw4y3MiA2fX1ovc6GKFedGzOVaYQ5h//y
hMYQpTmMIUZg/mL79H4PVwhxv2AAAAAEIFTkSuQmCC",
"sign_status": "in progress"
}
```

Qaimənin imzalanma prosesinin vəziyyətini yoxla

Metod qaimənin imzalanma prosesinin vəziyyətini yoxlamağa imkan verir.

Endpoint: */check_sign_doc/*

HTTP Method: POST

Authorization: Bearer <token>

Request parameters:

Parameter	Type	Description
id	<i>integer</i>	Document identifier
sign_type	<i>varchar(10)</i>	Sign type , possible values: imza – Asan sign sima – Sima sign

Response:

Parameter	Type	Description
status	<i>varchar(50)</i>	Status of request, possible values success – in case of successful request error – in case of error
message	<i>varchar(1024)</i>	Detailed information about result
sign_status	<i>varchar(20)</i>	Signing status

Example request:

```
POST /check_sign_doc/
Content-Type: application/json
{
  "id": 3761,
  "sign_type": "imza"
}
```

Example response:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "status": "success",
  "sign_status": "error",
  "message": "SIM application error"
}
```

Qaimənin imzasını rədd et

Metod imzalanmamış qaiməni rədd etməyə imkan verir, bu əməliyyat qaiməyə rədd edilmiş atributunu təyin edir. Bu əməliyyat geri qaytarıla bilməz.

Endpoint: /reject_doc/

HTTP Method: POST

Authorization: Bearer <token>

Request parameters:

Parameter	Type	Description
id	<i>integer</i>	Document identifier

Response:

Parameter	Type	Description
status	<i>varchar(50)</i>	Status of request, possible values success – in case of successful request error – in case of error
message	<i>varchar(1024)</i>	Detailed information about result

Example request:

```
POST /reject_doc/  
Content-Type: application/json  
{  
  "id": 3761  
}
```

Example response:

```
HTTP/1.1 200 OK  
Content-Type: application/json  
{  
  "status": "success"  
}
```

İmzalanmış qaimə üçün ləğv sorğusu göndər

Metod imzalanmış və tamamlanmamış qaimələr üçün imzalama ləğv sorğusu göndərməyə imkan verir, bu əməliyyat qaiməyə ləğv edilmiş atributunu təyin edir. Bu əməliyyat geri qaytarıla bilməz.

Endpoint: `/cancel_doc/`

HTTP Method: POST

Authorization: Bearer <token>

Request parameters:

Parameter	Type	Description
id	<i>integer</i>	Document identifier
sign_type	<i>varchar(10)</i>	Sign type , possible values: imza – Asan sign sima – Sima sign
cancel_notes	<i>varchar(1024)</i>	Cancellation notes

Response:

Parameter	Type	Description
status	<i>varchar(50)</i>	Status of request, possible values success – in case of successful request error – in case of error
message	<i>varchar(1024)</i>	Detailed information about result
code	<i>text</i>	In case of sima – qr code in base64 imza – code of signature request

Example request:

```
POST /cancel_doc/
Content-Type: application/json
{
  "id": 90,
  "cancel_notes": "sdfdsfsdfsdf",
  "sign_type": "sima"
}
```

Example response:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "status": "success",
  "code": "data:image/png;base64,
iVBORw0KGgoAAAANSUheUgAAAKYAAJGAQAAAACWpnfBAAAJNUIEQVR4nO2cXa7rNgyECWgBxPK2riVIAQ
```

JYizPDOLd9KVCYfWBwcJsTy98piPFnSDrm/9FrW5Oa1KQmNaIJ/2uSndf0D6jLP3ObjfvVrrXvS3yte1l8fr85V+/39
8/9Gk0qIt3/ve8+q3zdP/u6f7V9LY/Px1lw8+xG3v/iEv7yWfOZIDSphnQ28/5gYfPt8vPrebPOobhXXecI3B/el25eH
IHZ6+N/oUmVJJhmGPTM6wPWHPedg3Adm8bROIz77mpSPSkwx63us9XxulYsOZtv+hA7v+MSqE2qJMnLHtKF
nYfTdXjceGMw6/vngf9HP96k90jIemCO//7n7/ITk94j5WtHSDxJDQzU4FwNjnaHV96RtB5XTYed9zapgBQL48fh
bqknlmCasqEZ3pd+N/f/yJHibZtURelOfwxh0KQqEEXPmkhaDarxRE53SUn9/SYVkBAPoQJxliwC4zHfWlg7DvV8
eP4CDovHzAS+SSUkiyWZmabJDmx75LNaPuF0Zcc04ibVkrZTmMOYApun9w3jjjOSPpi2a1jWpCpSXEEJDTC5F
QbOg7QIIE6pdb/AOINqiLtKF3HEmNVG7kMph/U2/C5I1GN05GOGWKxSWUkmGwwQscvIGQIGz0JUJz1ctmxy
Y5Zb2tSEWko2XF0JNBtCAuWQDSUS53Vbo/6zcrK92hSEQn6zyAgtHxQ7rtJ+rvzfVRDuXKo79SkKhI+3jTKxTw07
BVFU8oLZq/8N6z/XGpSFSnr2bBOQxRVdU0fZoPCoDo+guPhfZv0MinMkemMSw5uZTonfsaGwzcjV0WGq0z22
ZFo0qsk5DXYdmPRGm4Vmc6xYFRiYNZD5Zz4xEtSknYwIvxFvQZcv7Fvnlr2LHRZAe8siaYmIRCyOXZeUCKCkxu
9XnR6VJEjquyCs3qYtkdL1sMsSvnHlxldmmp/oSiIkov+GPNKmE5LHPPp4SpeGVamMO4m0rIYzRib7qK416W2
SZL3hXwj9LS24WSKFul8+UmBUCVjKlZpUQDK1+L4pT/hXhNChmij+oCM5yiYG66ZNqiFt5jI+UmQ4E5w8EdSRB
vEh74tO4HdasEkFpMFeOhu2ileQF6Zq92A5bbldocTnoTaa9DZpUPOh5DmRk6YujIb/OvEzqN9KwVv+6qNjr1
NQtpibORO58DL+YRJUAxfj+wERqbzvLFJVSSX7cJSfshj5fUhpvmJuCn1TmEh25SGck0r4QtZWUUiapGYCx78iE
QsyBq3/H5JhWQUCGDITqV38oUFYzY6oWgigxosCCHRKIJNSSo+djJGV3BMEqWXqDp3R/6w9XEwFn4rdM16V
WSmuoySqQ/8MGXboo3kZyuzfMC0mpSIWmHje54hm88SjJs/Qkg6T/BGCqOPrxvk94m5WdO7Y46DTqB2Pal0
Lr2I+WBocOmm1RCghDkWg4MSv9dsNe16Z7tacd5Y5OqSBYCeA4GOM3aGDPDRi92C5EZ4c1Q/GxSDUnt95A
OE1H0ycOGZ7XbEV1hvhHaa1IZyR6mid2m/jDowsythjyyWtMXt5j9+PEmvU+C1Njfr9KZSF3HR2MvcUaGerbGu
XgKkdGkMpKKZ2HpgB8hYn9JGnFuDX7isDhavn/Ux5v0LomtP04CzoyiA6NMeGLvO2VGBekcG0S9rUIIJMgLYz9
2pozAfRILcUYca5DbxvsmFZKc04IzPfHqYCA6Eth52LfxYBBhEOXTJtWQLJ9T/+nsxSpu9VJonfDKCpjrcXaaVEPaG
nKnReqBMJPIYETIVDXfh2MuhnbcPALS0AN8W0OdaNhGUmMS9zwCkP5Mby+63iZvKsxFfNhr1L2taDgi9txx1b
5jTTObs8/z1KSXSUMxOKTgnfLxal40ZRYEzT783Hro1n4qNE16mcTqC16bA2WlKIFXbdsuRUsohC7X8xBNKiFlaQ
2AoULp4JcQ8BISnNQcJn/8yFib9DYJLtaY+OTTz+B9Y8+d1WsKevlg9Qmf0xNNeptkiocRRZdh+OUjYFFK9uMRM
WfeukwypUIVpJ29CE4tUVWwdB2m7OwWUvFH/OQJsm/W06S3SUbvu+L9iZM0YnXjmdqE90XBjg331/s26W0
SNjySUHc1Bsd3DG1tPccQNr0oMhBRf55+btLrJD56ghC61G83JKcow7D54CyRIqtVaG1SGQnbCPE31E3KzsNmo
y/OSGhENHXDbhE8U2006W3SYIMdFulbXxDIzNTWrlhlnBQD5h/5r5NepeE5gNb67HWOWE92WZXamMYQ8
P6nNv1JpWRIiTOraEJKELoe9TP0CcMPx33fSPqROLjTSoiwXCRkLomXAack1q7eJpBMtFVMYX1S6k0qYCUhWr
MUOhcmPFcTByHn+KNGoBm8xE5m/Q2achGmdc4J5iw/0MTTOObChlv4WTTM/dt0qukFH/wqeoRza3BT2x4r
kS+g1jKhKhJrst3bxKKKxL6OBd6g/yIbUBE1G/Iu0IVJih4Q5Wayp5pqWlQluInEttYzyFrJkRNKiHpJkRF1NLYwt2In
3LJSgyNU4QzIWWTqkjOoekFnwofTO34gQ82ZbWqeV+uAsDal48mVZFYz16QGlTJqFPWT+WqE+mqZAFU/O/kb
NLLpM0WX9RHUWy7GDzhWTOVCew7tt31NVdc0KQKkqkXQQGhCujBQzviuSKmtl4iHAeaojk/mlRFeryiZYSkhr
ExdtjokgOJkgz+yFB3okklJC5PARHed3AqcMHRmpJTHQGqECRko0IIFbXjO52qWCzXF/vgSRIAXPJyp11nSYVkfC
B8WGUOR7f1GJsBq6oxyz7TnfSjpW9NqmGNDjkoheGqc1SeWyj7DAVs53PQJxlaF80qYSE1+BkhPMUsMu0MP
Cy8fAQLzGoDgqO1aQqUmz9OQUb39cSV4aeHBqcV1r5K1Ke7Bk+qmtNepsUV1CrhqRI54rluRBCPYcp+FzmSh/
cpDLSJz2occ+VASFR3QiPeNA59h+5qk6QjSaVklir1rhEbO1KISgLRv/WVT1F1DVvUi3JLBUGuu6WzwxhneBndU
a40jFallZKbyv6SZUsInD1gghzNeQpelryqhF3L1JZSRkPQNpaVw/lxUk0Sc0jVSYBq6NUxxLOA7TpALSf/JqUpOa1
KQmNel/TPoLdh+rngrBPkoAAAAASUVORK5CYII=",
"sign_status": "in progress"
}

Qaimənin ləğv imzalanma prosesinin vəziyyətini yoxla

Metod qaimənin ləğv imzalanma prosesinin vəziyyətini yoxlamağa imkan verir.

Endpoint: `/check_cancel_doc/`

HTTP Method: POST

Authorization: Bearer <token>

Request parameters:

Parameter	Type	Description
id	<i>integer</i>	Document identifier
sign_type	<i>varchar(10)</i>	Sign type , possible values: imza – Asan sign sima – Sima sign

Response:

Parameter	Type	Description
status	<i>varchar(50)</i>	Status of request, possible values success – in case of successful request error – in case of error
message	<i>varchar(1024)</i>	Detailed information about result
sign_status	<i>varchar(20)</i>	Signing status

Example request:

```
POST /check_cancel_doc/
Content-Type: application/json
{
  "id": 3761,
  "sign_type": "imza"
}
```

Example response:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "status": "success",
  "sign_status": "error",
  "message": "SIM application error"
}
```

Qaimə üçün qəbul/rədd imzalama sorğusu göndər

Metod təhvil verilmiş və təsdiqlənməmiş yük qaimələri üçün qəbul və ya imtina imza sorğusu göndərməyə imkan verir.

Endpoint: /sign_accept_doc/

HTTP Method: POST

Authorization: Bearer <token>

Request parameters:

Parameter	Type	Description
id	<i>integer</i>	Document identifier
sign_type	<i>varchar(10)</i>	Sign type , possible values: imza – Asan sign sima – Sima sign
reject	<i>integer</i>	Type of request, possible values: 0 – acceptance 1 – refusal
acceptance_notes	<i>varchar(1024)</i>	Acceptance/Refusal notes

Response:

Parameter	Type	Description
status	<i>varchar(50)</i>	Status of request, possible values success – in case of successful request error – in case of error
message	<i>varchar(1024)</i>	Detailed information about result
code	<i>text</i>	In case of sima – qr code in base64 imza – code of signature request

Example request:

```
POST /sign_accept_doc/
Content-Type: application/json
{
  "id": 90,
  "acceptance_notes": "all is good",
  "sign_type": "sima"
}
```

Example response:

```
HTTP/1.1 200 OK
Content-Type: application/json
```

```

{
  "status": "success",
  "code": "data:image/png;base64,
iVBORw0KGgoAAAANSUHEUgAAAKYAAAAJGAQAAAAACWpnfBAAAJPEIEQVR4nO2cS27kOgxFCWGbTsrV3UuqB
QhgWzyXtPN69ICGILhcTx53ggkSlvqZj/o8+0JjWpSU1qUpN+NcnW5/CvXd+5Do5pNr5x6XOuM/qc121x/jpY
V6/j63t9RpM2ka7f19Pje1zPDY9HL+TndM6vG66T6yXXTy5Z3fM9IDRpD2kN5nXijMG/eL7+vIz3wRZvftYU4NLF
uzDrnfGSi7SmRpO2khhqzLSuD6w5MGsifJZNR5FFN8RTTfoFJlb9Oj3XUMdnGXQM+wLoZlZ8st3hojZpJym97JoC
H0Yep+t43DjQ266vDLdmxF9+vEmvkYh6MMf///07fmrSe6T6hH89wzrDQA3najaDGbxuxaBkj2ebdIGELElcUxh
ady+FkyraCi870G4WuNv8eYmbSOJYZ5+1zKrYBWNe1wBUbjeFcNmKsmUadiWkrLAD/kiibtyDm7kiUVdJ80zgG
V1Bd+kLaQKcEgVHinJSTYfPpbj4iP8NCLug6tuAmvU/iiXKonoab3vcTBzE70gcvzJDMVhbcPndJy5tiqesK6loNe8
wO/G7klh7ZleJNuOE42aQ9JG4nfiHjJ26NLPCM7N95zguU/UxRx1lvUmbSO4y2TWYCxcmGWcmAdEn/oxLjpW
XoZPrN2kTiYeld4aWR6OIIAmi4Z5dlpzjs0v5Hk3aR2KRxGoHlhoL5pLQTMfuOmYiAB5Zd2rSHIKeJuelPD6GN+w
V0ZTOlqNX/cT0x+19m/Q2aVTwEoYbFQbGXDOCuZAFcPpy/UEct2e20aSXSTyd6QXu9qhIzQAFtgzVIQFqhwT5
44m7SKF+kKqMaqou9yqyx/HPeT9YcSWK23UIOSKYJM2kCqD94dbdTW5VNxK3ck08njI7GBq0i4SScOM/jjWYc
w+aKgzKTTpAZFEon+nV27SBhLrlaul/G7ErTNr74y5P+oSGDpxLi9p0hYSI2nErdEtScyT2cZ6zjDoDIhmdpzVHGnS
FhL5etwo51qemBTEK1AILEJ4kxKgclOTtpCoMLAApuRJul/vyee+96wZ1fny8SbtImmFZPBjMvwOcFhLsWBmx1S
N11lfUasTXqZ5Fos2DLejhUyDwn3CQ5Tb55ZOAz7m7BJr1NKLscsuZz+J0XhuSGfz1428zzPGt3ttGkt0mkCwMB
Rq3xRqRj2lGk1FBCqfQb1W+ffrJL5OGtJkT8zUI/bcUqtU1HK3ROUH7RbboNmkXyaVqx3OxZ4iv608LeeasQNW
zbXDKG0aTnpFi/AleTgTR8WYbUc+1K7//KglakYvOHxbcpFdJM9s5Z3aWjVt64bz7I//wLB6aWpmeOl2TXiX5Pea
H5T4h+WaYyDxggWXYK8tv0kaSrsctYyHa8E8c1FVtOTZW2FZ4EXXadluEnVagtPSZrISylCHRkrjXE4xdLTWJm0
ipcRCvijh01QPvIF3SrQ2244jg6Ttokm7SNwSa6asMx49JaqF5h3B7JoLqN11kPc3aRfpplgU18nyjyePNopSuz2EA
RbPkZJAK/aQomTEYBrdgmoYdJBDjYQKjsj1pXaroalJm0gy4hrPkNBQ3b7Z9mKKdEpRkz9Wt3WT9pA8xezwopod
pC1GUbaPs4GqmyHC1KhgpyHmTtpFOYFKsTYX3wd6U0ABwt+mAjTxyZJ2wSTtJ6DFhuPkzF9Wv1VoahXrG/NA
EyU+TtpDmY7PXkBhzjGwMZJBuFpjTXNBGUmtTpfYF2Vyt6NgmycrK0gmHZRL9JObxJe0iDvr9sXyoJDaeLx5
2aGrpzVfEVP91k/aQInVQN4S7JoJR4tP/hLinAKk/CyYKzbi9b5NeJ6k1XsM7o5tsZHMEKcVQqERazzRRcek5C5r
OOikyQo3zYdXyyY6TNGVUqKSkxDa7FZomvU1ieZzq5TQKDrLU+Ec7VtvF7mY0j3D1JNr1Jm0izdzuDGCgfZqKRT
NIGwlcVlfsuESdJu0iZchj+F1jB4O6CE9ljdPa549oVknzHanJu0gWdYAOR0KjUoNjmsOk5XGZIMr6slCOxrJ20gjm
9wxSv8pXWPKrgbeyPj55x+ScFRZatlWkmezrVWvBLHMY+OXpfdFsCnD/el9m/Q2CWHGM2gdttsy+wErj2SBVc
/gXZa/fUGTXiZ40xpbZZK6jx0FI5ThsalTwaw3qR9JFSWCFRhlPwq8pDFglvcdsy8ToYz2yjSa+TMlk/Z/aRUe6LN
VMxjtywJxuDUs2PiLVJb5NqtVQ6eHdYH55NulQ2ZJMwXqM3P8bsTbpVZLMNP/rABkh+T0rKoUmzwr8uFdUL
afepE2kob3OMAh8johDVYsY7Gb48sLyvua5bDZpF2lmacizqM7YmtqXDqbDoMylQbNZE8f8PzQ0iyT3qf/OGY
ZVMZ/ZAFtuEMh1NOz6oSjSztIY6HxJivPC6Df08QpsbnLG3bsnjlt0m7SAiiM6121B6vT2XzuFirMiDqGuwm7SK
Vmbq6AsnszVMQTSX7fGT/BxUJUwtMkzaRUqtOqzWWYqnc4iiXjOxt6il8mB2P7okmvU1inTT+xxXeN0vrKh+IN
Y/IIC13LQyzNv7NullksdmWa/UUBmhlsqZbfJW9XalHWT/QjZpCykCVSMCpcBuKdgAdneVldTa6SPfPzM7adIm
Etm83b422uQ9vuC9dq5k7V0NTVGcH03aRlrf478USKga2OMsCGngRyqWqgWYQ91rUlV2k2Syx8ihHlkGRMZ2t
qpKqL/ZZCDtqY836W1SbvlKd3t67uHzCGpYV5G9E3AkvplIJm0gKQKN9N0yLA0jdlMx8AwdNLONCGxTm/mhrj
XpZVLMgpgCpoFF3sasiXSGbqgaLwenqWGWSXtlfAzrzO0mDDLrp5PNW16S4K0yIN0V+Ca9TYoRVxbION/NEfEo
oVD9SapRNU7eN8mvUwicfevRrsCGfwulurZ+TKzq9qzDJVRbZn2kL7lQQ8kGc/WeMtNfigBBLNOH73VDLorEk
3aQrLc6Tuz7Yik8DRpMKeyEGWHh8tDq6zUpJ0k9b+bJ89qzxA7wMKg+emZLxlcNWkbKbwvPy2N+EdW8eUlcS
kaq80qF3H3Jm0jhQM9KmU3rZNWSQZJv6tvAns9TF0Vp6kdpkbbSP/k06QmNaIJTWrsLyb9AYgHpf+dBnxxAAA
AAEIFtkSuQmCC",
  "sign_status": "in progress"
}

```

Qəbul/rədd imzalanma prosesinin vəziyyətini yoxla

Metod qaimə sənədlərinin qəbulu və ya imtina imzalanmasının gedişatının vəziyyətini yoxlamağa imkan verir

Endpoint: `/check_sign_accept_doc/`

HTTP Method: POST

Authorization: Bearer <token>

Request parameters:

Parameter	Type	Description
id	<i>integer</i>	Document identifier
sign_type	<i>varchar(10)</i>	Sign type , possible values: imza – Asan sign sima – Sima sign

Response:

Parameter	Type	Description
status	<i>varchar(50)</i>	Status of request, possible values success – in case of successful request error – in case of error
message	<i>varchar(1024)</i>	Detailed information about result
sign_status	<i>varchar(20)</i>	Signing status

Example request:

```
POST /check_sign_accept_doc/  
Content-Type: application/json  
{  
  "id": 3761,  
  "sign_type": "imza"  
}
```

Example response:

```
HTTP/1.1 200 OK  
Content-Type: application/json  
{  
  "status": "success",  
  "sign_status": "in progress",  
  "message": "Document is not signed yet"  
}
```

Qaimə üçün qismən göndəriş

Metod daşıyıcıya qaimə sənədlərinin bir hissəsini göndərməyə imkan verir

Endpoint: `/ship_doc/`

HTTP Method: POST

Authorization: Bearer <token>

Request parameters:

Parameter		Type	Description
id		<i>integer</i>	Document identifier
consignee_id		<i>integer</i>	Identifier of consignee
items		<i>array</i>	Array of waybill item record objects
Item record object	id	<i>integer</i>	Identifier of waybill record
	cnt	<i>float</i>	Shipping quantity

Response:

Parameter	Type	Description
status	<i>varchar(50)</i>	Status of request, possible values success – in case of successful request error – in case of error
message	<i>varchar(1024)</i>	Detailed information about result

Example request:

```
POST /ship_doc/
Content-Type: application/json
{
  "id": 1704,
  "consignee_id": 20,
  "items": [
    {
      "id": 1196,
      "cnt": 10
    }
  ]
}
```

Example response:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "status": "success"
}
```

Qaimənin PDF surətini əldə et

Metod yol sənədinin pdf nüsxəsini əldə etməyə imkan verir.

'X-LANG' dil parametri sorğunun başlığında göstərilə bilər. Mümkün dəyərlər:

- Az
- En

Endpoint: /waybill/

HTTP Method: POST

Authorization: Bearer <token>

Request parameters (required):

Parameter	Type	Description
id	<i>integer</i>	Document identifier

Request parameters (optional):

Parameter	Type	Description
output	<i>varchar(10)</i>	Output format, default binary, possible values: • binary • base64

Response:

The response returns waybill pdf copy

Parameter	Type	Description
status	<i>varchar(50)</i>	Parameter is returning only in case of error
message	<i>varchar(1024)</i>	In case of status error, detailed information about cause of the error
data	<i>text</i>	Base64 content in case of output format set to base64

Example request:

```
POST /waybill/
Content-Type: application/json
X-Requested-With: XMLHttpRequest
X-COMPANY-ID: 1
x-lang: en
```

```
{  
  "id": 555,  
  "output": "base64"  
}
```

Example response:

```
HTTP/1.1 200 OK  
Content-Type: application/json  
  
{  
  "data": "..."  
}
```

Yol vərəqələrini əldə et

Bu üsul marşrut siyahılarını əldə etməyə imkan verir.

Endpoint: `/routes_lists/`

HTTP Method: POST

Authorization: Bearer <token>

Request parameters (optional):

Parameter	Type	Description
date_from	<i>varchar(50)</i>	Starting date, format "yyyy-mm-ddThh:mm:ss.sss"
date_for	<i>varchar(50)</i>	Ending date, format "yyyy-mm-ddThh:mm:ss.sss"
num	<i>varchar(50)</i>	Route list number, searching by entry
id	<i>integer</i>	Route list identifier
car_num	<i>varchar(50)</i>	Vehicle number, by entry
driver_name	<i>varchar(250)</i>	Driver name, by entry,
driver_id_card	<i>varchar(50)</i>	ID card of driver
status	<i>integer</i>	Route list status, possible values: 0 - Free, 1 - Waiting, 2 - In process, 3 - Completed
page_index	<i>integer</i>	Page number
page_size	<i>integer</i>	Quantity of documents per page
sort_field	<i>varchar(50)</i>	Name of field for sorting
sort_direction	<i>varchar(50)</i>	Sorting direction, possible values: asc – ascending desc – descending

Response:

The response returns total count of the route list documents with details about each one

Parameter	Type	Description
status	<i>varchar(50)</i>	Parameter is returning only in case of error
message	<i>varchar(1024)</i>	In case of status error, detailed information about cause of the error
total	<i>integer</i>	Quantity of the documents
items	<i>array of objects</i>	In case of total > 0 array will contain the information about documents
Route list object parameters description		

id		<i>integer</i>	Route list identifier
num		<i>varchar(50)</i>	Number of route list
dat		<i>varchar(50)</i>	Date of route list, format "yyyy-mm-ddThh:mm:ss.sss"
date_from		<i>varchar(50)</i>	Starting date of route list, format "yyyy-mm-ddThh:mm:ss.sss"
date_for		<i>varchar(50)</i>	Ending date of route list, format "yyyy-mm-ddThh:mm:ss.sss"
notes		<i>varchar(1024)</i>	Route list notes
obj_id		<i>Integer</i>	Carrier identifier
dst_latitude		<i>float</i>	Latitude of destination address
dst_longitude		<i>float</i>	Longitude of destination address
src_latitude		<i>float</i>	Latitude of source address
src_longitude		<i>float</i>	Longitude of source address
src_address		<i>varchar(1024)</i>	Source address
dst_address		<i>varchar(1024)</i>	Destination address
documents_count		<i>integer</i>	Number of documents in route list
driver		<i>object</i>	Information about driver
Driver object parameters	id	<i>integer</i>	Identifier
	id_card	<i>varchar(50)</i>	ID card
	name	<i>varchar(250)</i>	Name
dispatcher		<i>object</i>	Information about dispatcher
Dispatcher object parameters	id	<i>integer</i>	Identifier
	id_card	<i>varchar(50)</i>	ID card
	name	<i>varchar(250)</i>	Name
fuel_auditor		<i>object</i>	Information about fuel auditor
Fuel auditor object parameters	id	<i>integer</i>	Identifier
	id_card	<i>varchar(50)</i>	ID card
	name	<i>varchar(250)</i>	Name
accountant		<i>object</i>	Information about accountant
Accountant object parameters	id	<i>integer</i>	Identifier
	id_card	<i>varchar(50)</i>	ID card
	name	<i>varchar(250)</i>	Name
sign_empl		<i>object</i>	Information about employee who sign route list
Signed employee object parameters	id	<i>integer</i>	Identifier
	id_card	<i>varchar(50)</i>	ID card
	name	<i>varchar(250)</i>	Name
reject_empl		<i>object</i>	Information about employee who reject sign of route list
Rejected employee object parameters	id	Identifier	Identifier
	id_card	ID card	ID card
	name	Name	Name
status		<i>integer</i>	Route list status, possible values: 0 – empty 1 - draft 2- signed 3 – in progress

			4 – completed 5 - cancelled
forwarder_name		<i>varchar(250)</i>	Name of forwarder
forwarder_id_card		<i>varchar(250)</i>	ID card of forwarder
lic_num		<i>varchar(50)</i>	Transportation licence number
lic_exp_date		<i>varchar(50)</i>	Licence expiration date, format "yyyy-mm-dd"
lic_type		<i>integer</i>	Type of license <i>integer</i>
lic_type_name		<i>varchar(50)</i>	Type name of licence <i>varchar(50)</i>
car_id		<i>integer</i>	Vehicle identifier
car_num		<i>varchar(50)</i>	Vehicle state number <i>varchar(50)</i>
trailer_id		<i>integer</i>	Trailer identifier
trailer_num		<i>varchar(50)</i>	Trailer state number <i>varchar(50)</i>
docs		<i>array</i>	List of document assigned to route list
Waybill object paramet ers	id	<i>integer</i>	- Waybill identifier <i>integer</i> ,
	num	<i>varchar(50)</i>	- Waybill number <i>varchar(50)</i> ,
	route_list_position	<i>integer</i>	Document position in route list <i>integer</i> ,
	src_address	<i>varchar(1024)</i>	Source address <i>varchar(1024)</i>
	dst_address	<i>varchar(1024)</i>	Destination address <i>varchar(1024)</i> ,
	status	<i>integer</i>	Document status, possible values: 1 - not signed, 2 - waiting for own signature, 3 - waiting for counterparties signature, 4 - signed by all, 5 - signature rejected, 6 - on the way, 7 - delivered, 8 - refused to accept, 9 - accepted by driver, 10 - delivered, not confirmed

Example request:

```
POST /routes_lists/
Content-Type: application/json
X-Requested-With: XMLHttpRequest
X-COMPANY-ID: 20
x-lang: en
{
  "page_size": 1,
  "page_index": 1,
  "sort_direction": "desc",
  "sort_field": "dat"
}
```

Example response:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
```

```

"total":99,
"items":[
{
  "id":351,
  "num":"YV-200000000000351",
  "dat":"2024-03-12T15:27:23.832",
  "date_from":"2024-03-12T14:27:52.525",
  "date_for":"2024-03-13T14:27:54.545",
  "notes": "",
  "driver_id":254,
  "obj_id":20,
  "signed_at":"2024-03-12T16:19:04.645",
  "route_list_type_id":2,
  "route_list_type_name":"Elektron əmtəə-nəqliyyat qaiməsi ilə rəsmiləşdirilmiş yüklərin daşınması",
  "rejected_at":null,
  "reject":null,
  "src_address":"main, 9-3, Baku, 02000",
  "src_latitude":50.4347185,
  "src_longitude":30.5393376,
  "dst_address":"main, 2, Baku, 49000",
  "dst_latitude":48.4784299,
  "dst_longitude":34.9096584,
  "documents_count":1,
  "driver":{
    "id":254,
    "id_card":"001234",
    "name":"JOHN"
  },
  "dispatcher":{
    "id":254,
    "id_card":"001234",
    "name":"JOHN"
  },
  "fuel_auditor":{
    "id":254,
    "id_card":"001234",
    "name":"JOHN"
  },
  "accountant":{
    "id":254,
    "id_card":"001234",
    "name":"JOHN"
  },
  "sign_empl":{
    "id":254,
    "id_card":"001234",
    "name":"JOHN"
  },
  "reject_empl":{
    "id":null,
    "id_card": "",
    "name": ""
  },
  "status":4,
  "start_fuel":200,
  "stop_fuel":60,
  "current_fuel":100,

```

```
"current_latitude":-1,
"current_longitude":-1,
"estimated_distance":0,
"forwarder_name": "",
"forwarder_id_card": "",
"lic_num": "",
"lic_exp_date": null,
"lic_type": null,
"lic_type_name": "",
"car_id": 163,
"car_num": "012145",
"trailer_id": 175,
"trailer_num": "00UA0123",
"docs": [
  {
    "id": 4544,
    "num": "NQMT-2000000004544",
    "route_list_position": 1,
    "src_address": "main, 9-3, Baku, 02000",
    "dst_address": "main, 2, Baku, 49000",
    "status": 7
  }
]
}
```

Marşrut siyahısı növlərini əldə et

Metod marşrut siyahısı növlərinin siyahısını qaytarır

Endpoint: `/route_list_types/`

HTTP Method: POST

Authorization: Bearer <token>

Request parameters:

Method does not use Request parameters

Response:

The response returns a list of waybill types

Parameter	Type	Description
id	<i>integer</i>	Unique identifier of route list type
name	<i>varchar(250)</i>	Name of route list type
series	<i>varchar(10)</i>	Default route list series

Example request:

```
POST /route_list_types/  
Content-Type: application/json
```

Example response:

```
HTTP/1.1 200 OK  
Content-Type: application/json  
[  
  {  
    "id": 2,  
    "name": "Elektron əmtəə-nəqliyyat qaiməsi ilə rəsmiləşdirilmiş yüklərin daşınması",  
    "series": null  
  },  
  {  
    "id": 3,  
    "name": "Elektron əmtəə-nəqliyyat qaiməsi ilə rəsmiləşdirilməsi tələb olunmayan digər yüklərin daşınması",  
    "series": null  
  }  
]
```

Marşrut siyahısı əlavə et və ya yenilə

Metod yeni marşrut siyahısı əlavə etməyə və ya mövcud marşrut siyahısını dəyişməyə imkan verir

Endpoint: /save_route_list/

HTTP Method: POST

Authorization: Bearer <token>

Request parameters:

Parameter	Type	Description
id	<i>integer</i>	Unique identifier of route list , 0 – creating a new >0 – updating existing
trailer_id	<i>integer</i>	Identifier of vehicle
route_list_type_id	<i>integer</i>	Identifier of route list type
driver_id	<i>integer</i>	Driver employee identifier
car_id	<i>integer</i>	Identifier of vehicle
lic_num	<i>varchar(50)</i>	Transportation licence number
lic_exp_date	<i>varchar(50)</i>	Licence expiration date, format "yyyy-mm-dd"
lic_type_name	<i>varchar(50)</i>	Licence type name
src_address	<i>varchar(1024)</i>	Source address
src_latitude	<i>float</i>	Latitude of source address
src_longitude	<i>float</i>	Longitude of source address
dst_address	<i>varchar(1024)</i>	Destination address
dst_latitude	<i>float</i>	Latitude of destination address
dst_longitude	<i>float</i>	Longitude of destination address
date_from	<i>varchar(50)</i>	Starting date, time of route list , format yyyy.MM.ddThh:mm:ss.fff
date_for	<i>varchar(50)</i>	Ending date, time of route list , format yyyy.MM.ddThh:mm:ss.fff
dispatcher_id	<i>Integer</i>	Dispatcher employee identifier
fuel_auditor_id	<i>integer</i>	Fuel auditor employee identifier
accountant_id	<i>integer</i>	Accountant employee identifier
start_fuel	<i>float</i>	Starting fuel level
current_fuel	<i>float</i>	Current fuel level
stop_fuel	<i>float</i>	Ending fuel level

Response :

Parameter	Type	Description
status	<i>varchar(50)</i>	Status of request, possible values

			error – in case of error
message		varchar(1024)	Detailed information about result
id		integer	Route list identifier
num		varchar(50)	Number of route list
dat		varchar(50)	Date of route list, format "yyyy-mm-ddThh:mm:ss.sss"
date_from		varchar(50)	Starting date of route list, format "yyyy-mm-ddThh:mm:ss.sss"
date_for		varchar(50)	Ending date of route list, format "yyyy-mm-ddThh:mm:ss.sss"
notes		varchar(1024)	Route list notes
obj_id		Integer	Carrier identifier
dst_latitude		float	Latitude of destination address
dst_longitude		float	Longitude of destination address
src_latitude		float	Latitude of source address
src_longitude		float	Longitude of source address
src_address		varchar(1024)	Source address
dst_address		varchar(1024)	Destination address
documents_count		integer	Number of documents in route list
driver		object	Information about driver
Driver object parameters	id	integer	Identifier
	id_card	varchar(50)	ID card
	name	varchar(250)	Name
dispatcher		object	Information about dispatcher
Dispatcher object parameters	id	integer	Identifier
	id_card	varchar(50)	ID card
	name	varchar(250)	Name
fuel_auditor		object	Information about fuel auditor
Fuel auditor object parameters	id	integer	Identifier
	id_card	varchar(50)	ID card
	name	varchar(250)	Name
accountant		object	Information about accountant
Accountant object parameters	id	integer	Identifier
	id_card	varchar(50)	ID card
	name	varchar(250)	Name
sign_empl		object	Information about employee who sign route list
Signed employee object parameters	id	integer	Identifier
	id_card	varchar(50)	ID card
	name	varchar(250)	Name
reject_empl		object	Information about employee who reject sign of route list
Rejected employee object parameters	id	Identifier	Identifier
	id_card	ID card	ID card
	name	Name	Name
status		integer	Route list status, possible values: 0 – empty

			1 - draft 2- signed 3 – in progress 4 – completed 5 - cancelled
forwarder_name		<i>varchar(250)</i>	Name of forwarder
forwarder_id_card		<i>varchar(250)</i>	ID card of forwarder
lic_num		<i>varchar(50)</i>	Transportation licence number
lic_exp_date		<i>varchar(50)</i>	Licence expiration date, format "yyyy-mm-dd"
lic_type		<i>integer</i>	Type of license <i>integer</i>
lic_type_name		<i>varchar(50)</i>	Type name of licence <i>varchar(50)</i>
car_id		<i>integer</i>	Vehicle identifier
car_num		<i>varchar(50)</i>	Vehicle state number <i>varchar(50)</i>
trailer_id		<i>integer</i>	Trailer identifier
trailer_num		<i>varchar(50)</i>	Trailer state number <i>varchar(50)</i>
docs		<i>array</i>	List of document assigned to route list
Waybill object parameters	id	<i>integer</i>	- Waybill identifier <i>integer</i> ,
	num	<i>varchar(50)</i>	- Waybill number <i>varchar(50)</i> ,
	route_list_position	<i>integer</i>	Document position in route list <i>integer</i> ,
	src_address	<i>varchar(1024)</i>	Source address <i>varchar(1024)</i>
	dst_address	<i>varchar(1024)</i>	Destination address <i>varchar(1024)</i> ,
	status	<i>integer</i>	Document status, possible values: 1 - not signed, 2 - waiting for own signature, 3 - waiting for counterparties signature, 4 - signed by all, 5 - signature rejected, 6 - on the way, 7 - delivered, 8 - refused to accept, 9 - accepted by driver, 10 - delivered, not confirmed
id		<i>integer</i>	Unique identifier of vehicle
car_num		<i>varchar(50)</i>	State number of vehicle
carrying		<i>float</i>	Maximum permitted weight
trailer		<i>integer</i>	Vehicle type, possible values: 1 – truck 2 – trailer 3 – semitrailer 4 – tractor
car_model_id		<i>integer</i>	Unique identifier of vehicle model

Example request:

```
POST /save_route_list/
Content-Type: application/json
{
  "car_num": "BH4444AC",
  "carrying": 35
}
```

Example response:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "trailer_id": 175,
  "route_list_type_id": 2,
  "driver_id": 12524,
  "car_id": 140,
  "lic_num": "",
  "lic_exp_date": "",
  "lic_type_name": "",
  "src_address": "Baku main Plaza 1",
  "src_latitude": 40.4,
  "src_longitude": 49,
  "dst_address": "Baku beach 1",
  "dst_latitude": 40.47691302877101,
  "dst_longitude": 50.3061605252092,
  "date_from": "2024-03-24T18:39:24.242",
  "date_for": "2024-04-30T18:39:28.282",
  "dispatcher_id": 293,
  "fuel_auditor_id": 9449,
  "accountant_id": 341,
  "start_fuel": 9,
  "current_fuel": 99,
  "stop_fuel": 999
}
```

Marşrut siyahısında qaimələri yenilə

Metod marşrut siyahısına yük qaiməsinin yerini əlavə etməyə, silməyə, dəyişməyə imkan verir

Endpoint: `/assign_route_list/`

HTTP Method: POST

Authorization: Bearer <token>

Request parameters:

Parameter	Type	Description
route_list_id	<i>integer</i>	Unique identifier of route list
documents	<i>array</i>	Array of waybill IDs, ordering of elements in the array determines the position of the waybill in the route list

Response :

Parameter	Type	Description
status	<i>varchar(50)</i>	Status of request, possible values error – in case of error
message	<i>varchar(1024)</i>	Detailed information about result

Example request:

```
POST /assign_route_list/
Content-Type: application/json
{
  "route_list_id": 350,
  "documents": [
    1002,
    1000
  ]
}
```

Example response:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "status": "success"
}
```

Marşrut siyahısı üçün imzalama və ya ləğv sorğusu göndər

Metod marşrut siyahısının imzalanmasına başlamağa imkan verir

Endpoint: `/sign_route_list/`

HTTP Method: POST

Authorization: Bearer <token>

Request parameters:

Parameter	Type	Description
id	<i>integer</i>	Document identifier
sign_type	<i>varchar(10)</i>	Sign type , possible values: imza – Asan sign sima – Sima sign
reject	<i>integer</i>	Type of request, possible values: false – signing request true – cancel request

Response:

Parameter	Type	Description
status	<i>varchar(50)</i>	Status of request, possible values success – in case of successful request error – in case of error
message	<i>varchar(1024)</i>	Detailed information about result
code	<i>text</i>	In case of sima – qr code in base64 imza – code of signature request
sign_status	<i>varchar(20)</i>	Signing status

Example request:

```
POST /sign_route_list/
Content-Type: application/json
{
  "id": 350,
  "sign_type": "sima"
}
```

Example response:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
```

```
"status": "success",
"code": " data:image/png;base64,
iVBORw0KGgoAAAANSUhEUgAAAKYAAAJGAQAAAAACWpnfBAAAJPUIEQVR4nO2cXY4jKwyFLbGALImts6QsAM
kTzg+hb79djYp5cClqJSnqq5bAxj52JflvHTOKVKQiFallRfqnsbGOvj69Eh97e0d+Xjni9RmCma9s+Pj5Em/GGvqOz
8jP0Yp0idTWd5+re8MovD6XjoV/98/fNXgh+4c61/ux7vM5td50Eop0h7Qms68lgJnXX+DXPKEHv8Fbwxaba4S3
KtJd0ueL+RpcC2sU5hwmm3zzOYtLI73iwOAi/QOkz/TCaj82uiZ/+dR3TBvr8rhw0g1Lg3egBRfpJsneVwuBHzFwrt
ea/ykG/DEwP4y7Sjdl3r/1+t3/FSk50jHMLBKV6Iaxq974p9OjZVDIARM87IuaQrJDraYDS6NkwGqkEM8GuTF
A+7a+omg1ZepFukifMMapBPdFLXKeQcDUkkZn5wseDq9X474CJdInEV2KEiU/z8Xakh2YyGXjTIYAY54XSbtYEiX
SE5gRgw0GS2oSQeU41Q6Ah8GKtqjYQ9dJEukCjGOGmg7hJYAgPbYzC9oLE27q5BAUC7ajFukbb3ZWq4dk7oNF
4aeoNkscPjSj3ldgqJl9ltUmCq5X2TQhrWBaNXJlu8WmKA3PBLp7JlI0gw4mS1YQbz+1S6j/InjBNS1+R9cc120kW
6Q5IVrhkeKjggBaFQOu19UTuStAZXjclFzrYiXSJh2kdT0hBn7MNNlCuhBj4MiLZiqtpFkS6RYLhL5vS0S4zZu2K+jUf
EymHhCqH/hSLdIDE7dAhDk2XNVsV22KivUNA6rW2ffrxID5OcUqiIND3byaxC6UX46oHAJ7eTplxapCskzja/Vko
BZE4rZFTPi/fJlZSj1o4OVqRLpF2nbbpZGf0qtAG3zQbMd0w1Rpcwu20SHdl2xaRuLOTgkEoF4UiVirC3mPphtO3
Ldl10nQXEufcKeNgCpJqG8SIlOLcArP9dJHukJz2NstnLcgl032XlWi+0kEhxaUrvUW6RWJpSMW9r/dNpYnuXWK
yGNGInrpnkEJOka6Q5mtl72QrLiu6KAOmUsNsbqamgBo6KNh846ciPU/itpkSzLoLEQxUh94g14f8hrQDHFQ8inS
LBNNMelYmgukqn5zua1ieCSSO3Gm9eX4tuEhPkxjdLQ0blqo8ACYXeSeyucMirY4XZapFskFo4imLtz2il1c3UEx
zZ36bY3u7B1Nw4r0iWShnPOd0TDWq6blbqLFawBzn5FnSjdl4VaBUe672zKQGG+751Nci1E7qYJRUDbgov0NG
ltfdJmnFL4aYaUgS6zTlkzNk8Jchk/uieK9DSJOSIXQiCf4Fr4InDja8r7ntZy8sjyi/Q0iYaYbl7QETCeyR40bKfsH0wrN
HmOL9l1EsUYV2tZf2BGyA2T1swMg1drObB0/9/OlyI9R0pvhno3SPhL6m2NF0kMWE6X0WuwDhH2TxTpaVJH
OKozobLtmK5UMGWcfllHdVdO+8i3SFRELvdKpdCFM3NZVTXkgmlaoDr2KWJlI0h4Qsmf2lZD/L2DfZymjqquu/
yMbhfI0jKMeSp2AsuR8NL0zuGftgBcQ29CzSJRlI6ZCANy5PtTSYWBzb6VoLEk1D92xUFkRCLtilnLmEm4pMHbH
aUkOP2HYGRKRmkS6Rpp6O7a7HKOmnRthcmmiqOCFWZcjDtsH39r5FepqE7CFUYNdGOvw6ohuKMfsXsBAQH
XtpkS6QZlUSabQfhjUYNjSlvW9Tu8Q485JWpEsk7ocR0k1KO2qTIFQKI6a0lRsy5D2l15QpCdJkCykny/Z/pjeN1y
XSGmosFeWKSh4H7FvkR4mhau4Yd2aorXSIOVxOxYlgh1kh1wa0tt08yJdlIDW529FUXy2k3om98Zvxa5McvK3G
OliLdluEPTO2ipa58wxNu/W2Vlmp9srZmw1rkgXSFuidutZb36KKI5fapmx3fMWcvDxiFil9DCJUXqHnCb97Ftzo
B7DRWGnyyJw4p0h0QDtQjanWQ4ZUTUk67Sp3L9sJ7K8KdlD0g0Wddp+5kj0nC1Ot60bAW50yXc0/sW6WGS
lbOggO2SezYXkZqiWk07MntmilR3epFukTZmyo8iClqQ9KI9Mym/EcBAVSHPN8sv0tMkbZsaNWSaSiMUEKX7q
SnbYNo7w6Uj2yjS0yT61NAzfJrph/8albX6IADk087bjbuLNlI0nTBoekZhZ5ysdLPkp5YHYLrznGqa9/u+CI9TVpTq
qSwT3Vsd1zXpx4tGIP9uRDV9GRYBH/g6tALivQ0SfELc3fFoRTSFOclAUO9Usk3F63yi9S4LrVTVP6merYNAYL
G7vISdYLBDeSa+ZaUi3SjXJ8zJdJABrLMNnB3hJ4fWgf0z37GlnVakWyR1UjPnUAlB1iQpMVopfd92+nFMF5eKdlf
UBKpQmbtkRBnbmeJw0clSDXsofvzaR5GeJuG6vmtHuyIRekLF7lbdyPcWrgXSBbpGmnBOPnphKPtXy9Glg/vO
+Cbx75a3rdl90hNq6DzJOecvpbRUADctGH2czzNt0i3SBGKVQ8xhm41JXLDiMPFQPtgVC1+7JxFeprEeWZwmm
pNinAFHpKbpr0dISr3UvnmI0iWVjZndSt04S1bWYeC6YxqSh1y6L2x0W6QGKCMa5wmGflrIFMP+Kc6rBOjVR4
m0W6RdlqgAVP9W+KpliGzWiWxbthWTKVnVakiyT92FjM40kvRjr6luhmM17tnc4p+xZpEskVoe+gQ+fb+Beyjl
7TRZ/2/chsGiQAl8iXSNhzqekshHK6TmwN19BfTQcAQWDHXrull0i4Xwyh2iuRYSrgulHHBAQxXTWmHpCZRyqd
pGeJnEVhJvlvCtq2uVitXlKoWlqrx4clkW6ROIhe02KNNNotZdDMKhjVvr9Vi7YrukW6RElsyuS+7walpv4lzfUN4pk
m39vgF8W6RbJM9894bTLblpGtVVSv0HWGMlewl+9a0V6muRHGehTlf+p+v0pReNvBFJyowgHhTszp2zSjdlYx
tIHt9Q+IxdJGTl1o816G5Fuk5yn0umEsdURNMt4YS7BUN5PwOilt0iWfs29kEgdN31QOWOkLTLRX00Eo7inSVp
KgH3tQ9FKpCrJusQ6lhqAsm7XfHFryLdIX0V44iFallRSpSkf5h0h9F9TvSRaLduAAAAABJRU5ErkJggg==",
"sign_status": "in progress"
}
```

Marşrut siyahısının imzalanma prosesinin vəziyyətini yoxla

Metod yol vərəqəsinin imzalanma prosesinin vəziyyətini yoxlamağa imkan verir.

Endpoint: /check_sign_route_list/

HTTP Method: POST

Authorization: Bearer <token>

Request parameters:

Parameter	Type	Description
id	<i>integer</i>	Document identifier
sign_type	<i>varchar(10)</i>	Sign type , possible values: imza – Asan sign sima – Sima sign

Response:

Parameter	Type	Description
status	<i>varchar(50)</i>	Status of request, possible values success – in case of successful request error – in case of error
message	<i>varchar(1024)</i>	Detailed information about result
sign_status	<i>varchar(20)</i>	Signing status

Example request:

```
POST /check_sign_route_list/
Content-Type: application/json
{
  "id": 350,
  "sign_type": "imza"
}
```

Example response:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "status": "success",
  "sign_status": "error",
  "message": "SIM application error"
}
```

Marşrut siyahısını sil

Metod mövcud marşrut siyahısını silməyə imkan verir

Endpoint: `/del_route_list/`

HTTP Method: POST

Authorization: Bearer <token>

Request parameters:

Parameter	Type	Description
id	<i>integer</i>	Document identifier

Response:

Parameter	Type	Description
status	<i>varchar(50)</i>	Status of request, possible values success – in case of successful deleting error – in case of error
message	<i>varchar(1024)</i>	Detailed information about result

Example request:

```
POST /del_route_list/  
Content-Type: application/json  
{  
  "id": 350  
}
```

Example response:

```
HTTP/1.1 200 OK  
Content-Type: application/json  
  
{  
  "status": "error",  
  "message": "Can't delete signed document"  
}
```

Marşrut siyahısının boş mövqelərinin siyahısını əldə et

Metod boş marşrut siyahısının siyahısını qaytarır

Endpoint: `/stop_periods/`

HTTP Method: POST

Authorization: Bearer <token>

Request parameters (optional):

Parameter	Type	Description
route_list_id	<i>integer</i>	Unique identifier of route list

Response:

The response returns a list of idles

Parameter	Type	Description
id	<i>integer</i>	Unique identifier of idle
date_from	<i>varchar(20)</i>	Date, time of start, format yyyy-MM-ddThh:mm:ss
date_for	<i>varchar(20)</i>	Date, time of start, format yyyy-MM-ddThh:mm:ss
notes	<i>varchar(1024)</i>	Notes

Example request:

```
POST /stop_periods/
Content-Type: application/json
{
  "route_list_id": 351
}
```

Example response:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "total": 1,
  "items": [
    {
      "id": 96,
      "date_from": "2024-03-12T19:39:03",
      "date_for": "2024-03-12T22:39:13",
      "notes": "test"
    }
  ]
}
```

Marşrut siyahısına boş mövqelər əlavə et və ya yenilə

Metod marşrut siyahısına yeni boş yer əlavə etməyə və ya mövcud olanı yeniləməyə imkan verir

Endpoint: /save_stop_period/

HTTP Method: POST

Authorization: Bearer <token>

Request parameters:

Parameter	Type	Description
id	<i>integer</i>	Idle record identifier 0 – creating a new waybill >0 – updating existing waybill
route_list_id	<i>integer</i>	Unique identifier of route list
date_from	<i>varchar(20)</i>	Date, time of start, format yyyy-MM-ddThh:mm:ss
date_for	<i>varchar(20)</i>	Date, time of start, format yyyy-MM-ddThh:mm:ss

Response:

Parameter	Type	Description
id	<i>integer</i>	Idle record identifier
route_list_id	<i>integer</i>	Unique identifier of route list
date_from	<i>varchar(20)</i>	Date, time of start, format yyyy-MM-ddThh:mm:ss
date_for	<i>varchar(20)</i>	Date, time of start, format yyyy-MM-ddThh:mm:ss

Example request:

```
POST /save_stop_period/
Content-Type: application/json
{
  "id": 0,
  "date_from": "2024-03-12T19:39:03.000",
  "date_for": "2024-03-12T22:39:13.000",
  "notes": "test",
  "route_list_id": 351
}
```

Example response:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "id": 96,
  "date_from": "2024-03-12T19:39:03",
  "date_for": "2024-03-12T22:39:13",
  "route_list_id": 351,
  "notes": "test"
}
```

Marşrut siyahısından boş mövqeni sil

Metod mövcud boşu marşrut siyahısından silməyə imkan verir

Endpoint: `/del_stop_period/`

HTTP Method: POST

Authorization: Bearer <token>

Request parameters:

Parameter	Type	Description
id	<i>integer</i>	Idle record identifier
route_list_id	<i>integer</i>	Unique identifier of route list

Response:

Parameter	Type	Description
status	<i>varchar(50)</i>	Status of request, possible values success – in case of successful deleting error – in case of error
message	<i>varchar(1024)</i>	Detailed information about result

Example request:

```
POST /del_stop_period/  
Content-Type: application/json  
{  
  "id": 96,  
  "route_list_id": 351  
}
```

Example response:

```
HTTP/1.1 200 OK  
Content-Type: application/json  
  
{  
  "status": "success"  
}
```

Marşrut siyahısının PDF surətini əldə et

The method allows to get pdf copy of the route list document.

The language parameter 'X-LANG' can be specified in header of request.

Possible values :

- en
- az

Endpoint: */route_list/*

HTTP Method: POST

Authorization: Bearer <token>

Request parameters (required):

Parameter	Type	Description
id	<i>integer</i>	Document identifier

Request parameters (optional):

Parameter	Type	Description
output	<i>varchar(10)</i>	Output format, default binary, possible values: • binary • base64

Response:

The response returns route list pdf copy

Parameter	Type	Description
status	<i>varchar(50)</i>	Parameter is returning only in case of error
message	<i>varchar(1024)</i>	In case of status error, detailed information about cause of the error
data	<i>text</i>	Base64 content in case of output format set to base64

Example request:

```
POST /route_list/
Content-Type: application/json
X-Requested-With: XMLHttpRequest
X-COMPANY-ID: 1
x-lang: en
{
  "id": 4,
  "output": "base64"
}
```

Example response:

```
HTTP/1.1 200 OK  
Content-Type: application/json
```

```
{  
  "data": "..."  
}
```

Qaimələr üçün toplu imzalama sorğusu göndər

Metod çoxlu yol sənədlərinin imzalanmasına başlamağa imkan verir. Toplu imza yalnız Asan imzası üçün mövcuddur.

Endpoint: */bulk_sign_doc/*

HTTP Method: POST

Authorization: Bearer <token>

Request parameters:

Parameter	Type	Description
docs	<i>Array of integer</i>	Array of document identifiers

Response:

Parameter		Type	Description
status		<i>varchar(50)</i>	Status of request, possible values success – in case of successful request error – in case of error
message		<i>varchar(1024)</i>	Detailed information about result
doc_signature		<i>integer</i>	Signature request identifier
phone		<i>varchar(20)</i>	Phone number for Asan sign
status		<i>varchar(20)</i>	Signing status
errors		<i>array_of_objects</i>	List of errors for document list
Error object parameters	doc_id	<i>integer</i>	Waybill document identifier
	doc_num	<i>varchar(50)</i>	Waybill document number
	error	<i>varchar(1024)</i>	Error message
	required_fields	<i>array_of_fields</i>	The list of fields that required to be added for successful signing

Example request:

```
POST /bulk_sign_doc/
Content-Type: application/json
{
  "docs": [4578,4579]
}
```

Example response:

```
HTTP/1.1 200 OK
Content-Type: application/json
{
  "status": "success",
  "doc_signature": 6,
  "sign_status": "in progress",
  "phone": "+994123123123"
}
```

Qaimələrin toplu imzalanma prosesinin vəziyyətini yoxla

Metod yol sənədləri üçün toplu imzanın gedışat vəziyyətini yoxlamağa imkan verir.

Endpoint: */check_bulk_sign/*

HTTP Method: POST

Authorization: Bearer <token>

Request parameters:

Parameter	Type	Description
id	<i>integer</i>	Signature request identifier

Response:

Parameter	Type	Description
status	<i>varchar(50)</i>	Status of request, possible values success – in case of successful request error – in case of error
message	<i>varchar(1024)</i>	Detailed information about result
sign_status	<i>varchar(20)</i>	Signing status

Example request:

```
POST /check_bulk_sign/  
Content-Type: application/json  
{  
  "id": 6  
}
```

Example response:

```
HTTP/1.1 200 OK  
Content-Type: application/json  
{  
  "status": "success",  
  "sign_status": "success",  
  "message": "Successfully signed"  
}
```